


DMSRE 2024
33rd Joint Seminar

**DEVELOPMENT
OF MATERIALS SCIENCE
IN RESEARCH AND
EDUCATION**

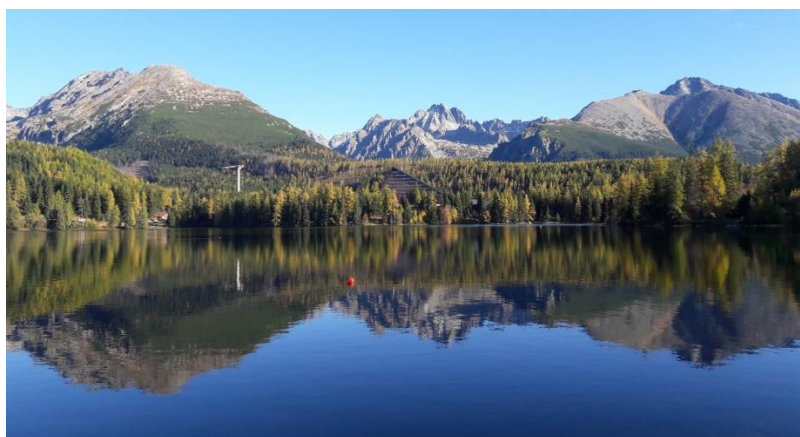

BOOK OF ABSTRACTS OF THE 33rd JOINT SEMINAR

9 – 13 September 2024
Tatranská Štrba

DMSRE 2024

33rd joint seminar

**DEVELOPMENT
OF MATERIALS SCIENCE
IN RESEARCH AND
EDUCATION**

BOOK OF ABSTRACTS OF THE 33rd JOINT SEMINAR

9 – 13 September 2024

Tatranská Štrba

Editors

Mária Behúlová and Zdeněk Kožíšek

© FCHPT STU Bratislava, 2024

ISBN: 978-80-8208-129-2 (printed version)


978-80-8208-130-8 (online version)

DMSRE 2024

33rd joint seminar

**DEVELOPMENT OF MATERIALS SCIENCE
IN RESEARCH AND EDUCATION**

*Hotel RYSY***, Tatranská Štrba, 9 – 13 September 2024*

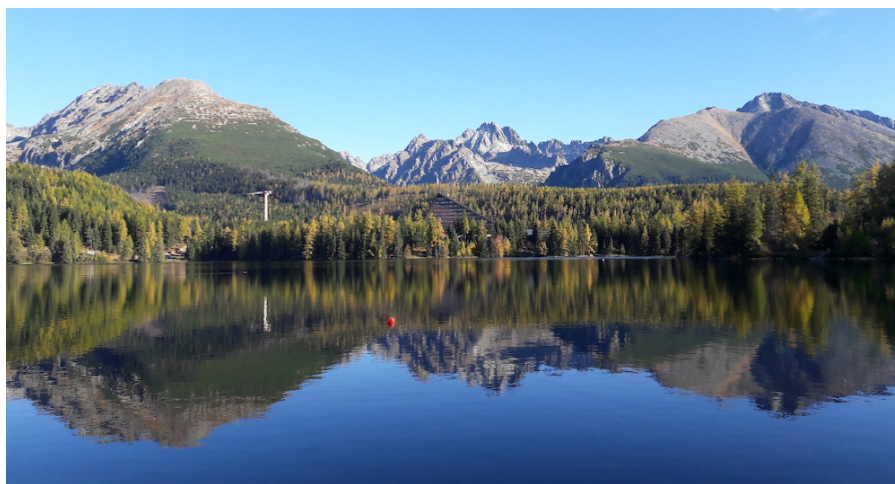

Organized by

Slovak Expert Group of Solid State Chemistry and Physics
Czechoslovak Association for Crystal Growth

Under the auspices of

Crystallographic Society

*Faculty of Chemical and Food Technology STU in Bratislava
Faculty of Materials Science and Technology STU in Bratislava
Institute of Physics of the Czech Academy of Sciences, Prague
Regional Committee of Czech and Slovak Crystallographers*

Sponsors

CE Digital & Enviro Grouping (CEDEG), Studentská 6202/17, 708 00 Ostrava-Poruba, Czech Republic

TESTOVACÍ TECHNIKA s.r.o., Československé armády 923/15, 290 01 Poděbrady, Czech Republic

Hermes LabSystems, s.r.o., Púchovská 12, 831 06 Bratislava, Slovak Republic

Hotel Rysy***, Horská 78, 059 41 Tatranská Štrba, Slovak Republic



Scientific Committee

Zdeněk Kožíšek (<i>chair</i>)	Institute of Physics of the Czech Academy of Sciences, Prague, CZ
Mária Behúlová	Slovak University of Technology in Bratislava, MTF STU in Trnava, SK
Juraj Černák	Pavol Jozef Šafárik University in Košice, Faculty of Science, SK
Jan Džugan	COMTES FHT a.s., Dobřany, CZ
Jan Grym	Czech Academy of Sciences, Institute of Photonics and Electronics, Prague, CZ
Ludmila Kučerová	West Bohemia University in Pilsen, FS WBU, Pilsen, CZ
Milena Kubišová	Tomas Bata University in Zlín, Faculty of Technology, Zlín, CZ
Vladimír Kuchtanin	Slovak University of Technology in Bratislava, FCHPT, SK
Shelley Lorimer	MacEwan University, Edmonton, Alberta, Canada
Maroš Martinkovič	Slovak University of Technology in Bratislava, MTF STU in Trnava, SK
Petr Mošner	University of Pardubice, Pardubice, CZ
Jan Pejchal	Czech Academy of Sciences, Institute of Physics, Prague, CZ
Jan Polák	Crytur Turnov, Turnov, CZ
Zdeněk Potůček	Czech Technical University in Prague, FNSPE, Prague, CZ
Kateřina Rubešová	University of Chemistry and Technology, Prague, CZ

Organizing and Program Committee

Mária Behúlová (<i>chair</i>)	Slovak University of Technology in Bratislava, MTF in Trnava, SK
Eva Babalová	Slovak University of Technology in Bratislava, MTF in Trnava, SK
Ivona Černíčková	Slovak University of Technology in Bratislava, MTF in Trnava, SK
Rastislav Ďuriš	Slovak University of Technology in Bratislava, MTF in Trnava, SK
Libor Ďuriška	Slovak University of Technology in Bratislava, MTF in Trnava, SK
Zdeněk Kožíšek	Institute of Physics of the Czech Academy of Sciences, Prague, CZ
Vladimír Kuchtanin	Slovak University of Technology in Bratislava, FCHPT, SK
Blažena Papánková	Slovak University of Technology in Bratislava, FCHPT, SK

FOREWORD

The seminar “Development of Materials Science in Research and Education – DMSRE” is the 33rd in a series that began in Gabčíkovo in 1991, initiated by the Czech and Slovak Association for Crystal Growth and the Slovak Expert Group of Solid State Chemistry and Physics.

The seminar provides an excellent opportunity for the presentation and discussion of results in the fields of materials engineering, chemistry, solid-state physics, production technologies, materials processing, and related areas.

Additionally, the seminar aims to facilitate the exchange of experiences in teaching technical subjects, chemistry, and physics at universities, and to explore the connections between university research and practical applications.

The scientific session will cover the following main topics:

- Trends in development of materials research
- Education of materials science at the universities
- Information about the research programmes of individual institutions
- Information about equipment for preparation and characterization of materials
- Results of materials research

The program will include two invited keynote lectures (40 minutes each), given by Shelley Lorimer from MacEwan University, Edmonton, Alberta, Canada, and Jan Džugan from COMTES FHT a. s., Dobřany, Czech Republic; 52 contributions presented as short lectures (20 minutes each); and two company presentations.

Dear Colleagues, we warmly welcome you to the 33 rd DMSRE Joint Seminar and hope you enjoy your stay in the High Tatras.

Organizers

CONTENT

Program	7
Abstracts	15
Roughness and wettability of the Ti Grade 2 surfaces modified by nanosecond laser	17
<i>Richard Antala, Peter Šugár, Jana Šugárová, and Michal Moško</i>	
Numerical simulation of dissimilar laser welding of titanium and AISI304 steel parts	18
<i>Eva Babalová and Mária Behúlová</i>	
Modelling and numerical simulation of temperature fields during WAAM production of an aluminium part	19
<i>Mária Behúlová, Eva Babalová, Miroslav Sahul, Martin Sahul, Marián Pavlík, and Tomáš Němec</i>	
The impact of surface roughness of replaceable cutting inserts treated with MRF technology on the turning process	20
<i>Ondřej Bílek, Jan Zlámal, Jana Knedlová, and Hana Vrbová</i>	
Exploring novel phases in the nickel-oxygen binary system with evolutionary algorithms and density functional theory modeling	21
<i>Radovan Bujdák, Diana Fabušová, Kamil Tokár, and Mariana Derzsi</i>	
Comparison of experimental and thermodynamic approaches in the study of Ga-enriched SAC305 lead-free solders	22
<i>Ivona Černíčková, Libor Ďuriška, Marián Drienovský, Tereza Machajdíkova, Michaela Halmanová, and Roman Čička</i>	
Hermes LabSystems - provider of solutions for laboratories	23
<i>Martin Cyprich</i>	
Modern composites in transportation constructions	24
<i>Daniel Ďugel and Lenka Lapašová</i>	
The determination of basic material properties using DIC	25
<i>Rastislav Ďuriš and Eva Labašová</i>	
Structural and thermodynamic studies of SAC108 lead-free solders enriched with Ga	26
<i>Libor Ďuriška, Ivona Černíčková, Marián Drienovský, Michaela Halmanová, and Martin Kusý</i>	
AM deposited metallic materials mechanical properties assessment with the use miniaturized samples	27
<i>Jan Džugan</i>	
Theoretical investigation and DFT modelling of novel Pd ₂ O polymorphs using educated guess and evolutionary algorithms	28
<i>Diana Fabušová, Radovan Bujdák, Kamil Tokár, and Mariana Derzsi</i>	

Impact of sputtering power on trace impurities in binary oxides: A ToF-ERDA characterization study	29
<i>Filip Ferenčík, Jozef Dobrovodský, Zoltán Száraz, and Pavol Noga</i>	
Interdisciplinary education of chosen parts of natural sciences for pre-service teachers ...	30
<i>Melánia Feszterová</i>	
Silver borophosphate glasses modified with tungsten and molybdenum oxide	31
<i>Tomáš Hostinský, Petr Mošner, and Ladislav Koudelka</i>	
Effect of structure on the fatigue properties of aluminum casting alloys	32
<i>Silvia Hudecová, Milan Uhrčík, Peter Palček, Veronika Chvalníková, Zuzana Šurdová, and Lukáš Šikyňa</i>	
Influence of annealing on Raman and photoluminescence spectra of single crystal ZnO ..	33
<i>David John, Zdeněk Remeš, Radim Novák, Jakub Volf, Oleg Babčenko, Egor Ukraintsev, Bohuslav Rezek, and Maksym Buryi</i>	
Monitoring of selected aspects during the plasma polishing of cemented carbide end mills	34
<i>František Jurina, Tomáš Vopát, Štefan Podhorský, and Boris Pätoprstý</i>	
Improving the efficiency of crystal growth process control by HDC method	35
<i>Juraj Kajan, Grigori Damazyán, Vira Tinkova, Tomáš Gregor, Štefan Medvecký, and Mykhailo Chaika</i>	
TESTOVACÍ TECHNIKA s.r.o. - company presentation	36
<i>Miroslav Kamenský</i>	
The effect of moisture on laser beam wood machining	37
<i>Jana Knedlová, Milena Kubišová, Jakub Javořík, Hanka Vrbová, and Vojtěch Dušek</i>	
Homogeneous versus heterogeneous nucleation in aluminum droplet at low supercooling: nucleation rates and the total number of nuclei	38
<i>Zdeněk Kožíšek, Robert Král, and Petra Zemenová</i>	
Study of thermochromic materials and their properties for visual indicators	39
<i>Robert Král, Lucin Fortin, Petra Zemenová, Morgane Poupon, Alex Nicaise, Jan Pavel Šafrata, David Daniel Šafrata, and Joris More Chevalier</i>	
Ternary lithium manganese (II) chloride as a new red-emitting neutron scintillator	40
<i>Vojtěch Vaněček, Robert Král, Kateřina Křehlíková, Petr Průša, Romana Kučerková, Vladimír Babin, Anton S. Tremsin, Petra Zemenová, Monika Kotyková, Jan Rohlíček, Zuzana Málková, Terézia Jurkovičová, and Martin Nikl</i>	
Effects of high fluence helium ion irradiation on the micromechanical properties of Eurofer97 and ODS Eurofer steels	41
<i>Matej Kubiš, Zoltán Száraz, Vladimír Kršjak, and Pavol Noga</i>	
Analysis of measurement uncertainties in mechanical production and subsequent use for process stability control	42
<i>Milena Kubišová, Jana Knedlová, Vladimír Pata, and Oldřich Šuba</i>	

The journey of nickel	43
<i>Vladimír Kuchtanin</i>	
Let's reveal the secrets of chemistry in the environment to children	44
<i>Alexandra Kucmanová and Margita Ščasná</i>	
Influence of final turning on SCC susceptibility and corrosion properties of austenitic stainless steel 08Ch18N10T	45
<i>Marek Kudláč, Mária Dománková, Katarína Bárťová, Matúš Gavalec, and Dávid Slnek</i>	
Methods for determining reliability of complex systems	46
<i>Eva Labašová and Vladimír Labaš</i>	
Using a Compositional Thermal Reservoir Simulator (STARS) to Examine Mechanisms and Scaling of Enhanced Oil Recovery Processes	47
<i>Shelley Anne Lorimer</i>	
Influence of specimen dimensions on tensile behavior of NiTi alloy	48
<i>Michal Kopelent, Monika Losertová, Radek Sedláček, Bedřich Smetana, Adam Kratochvíl, Kristýna Kubášová, and Bogusława Adamczyk-Cieślak</i>	
Impact of nickel addition on the phase composition and properties of Sn-Ag-Cu solder alloys	49
<i>Tereza Machajdík, Roman Čička, Ivona Černíková, Libor Ďuriška, and Marián Drienovský</i>	
Assessment of the suitability and durability of a recycled polymer product as a building component	50
<i>Lenka Markovičová, Viera Zatkalíková, and Patrik Chobot</i>	
Efficiency of selected sorbents for eliminating PCBs from soil	51
<i>Jaroslava Marosová</i>	
Measuring the toughness of weld joints on a tensile test machine.	52
<i>Maroš Martinkovič and Pavel Kovačócy</i>	
Analysis of the influence of geometric and material parameters of fixing edge layers on the modal properties of plate structures.	53
<i>Milan Nad', Ladislav Rolník, and Peter Bucha</i>	
Theoretical modelling of the frequency-dependent phase shift between emission and excitation in ZnO nanorod photoluminescence spectra	54
<i>Radim Novák, Zdeněk Remeš, Štěpán Remeš, and Júlia Mičová</i>	
Surface modification of additively manufactured parts by drag finishing	55
<i>Boris Pátoprský, Ladislav Morovič, Ivan Buranský, Maroš Dubnička, and Marek Vozár</i>	
Site-controlled growth of InGaAs quantum dots with buried stressor for the development of microlasers and quantum light sources	56
<i>Martin Podhorský, Maximilian Klönz, Imad Limame, Sarthak Tripathi, Kartik Gaur, Chirag Chandrakant Palekar, Priyabrata Mudi, Petr Klenovský, Sven Rodt, and Stephan Reitzenstein</i>	

Effect of sample illumination on the content of luminescence active defects in $\text{Sn}_2\text{P}_2\text{S}_6$ crystals	57
<i>Zdeněk Potůček and Zdeněk Bryknar</i>	
Polymorphism of methylsalicylatocopper(II) complexes	58
<i>Miroslava Puchoňová, Ján Moncol', Ján Pavlik, Vladimír Kuchtanin, and Vladimír Jorík</i>	
Nanosecond photoluminescence decay in Mo-doped ZnO nanorods observed by TCSPC and phase shift methods	59
<i>Zdeněk Remeš, Neda Neyková, Štěpán Remeš, Radim Novák, Romana Kučerková, Vítězslav Jarý, and Julia Mičová</i>	
CEDEG - a partner for your business, research and innovations	60
<i>Ivo Říha</i>	
Biochars from Cardboard as an Alternative Adsorbent for the Removal of Pesticides from the Water Environment	61
<i>Margita Ščasná, Alexandra Kucmanová, and Maroš Sirotiak</i>	
The impact of generator parameters on cutting width in machining nickel alloys using WEDM technology	62
<i>Vladimír Šimna</i>	
Thermoelectric properties of doped $\text{Bi}_2\text{O}_2\text{Se}$	63
<i>Antonín Sojka, Jan Zich, Čestmír Drašar, Tomáš Plecháček, Jiří Navrátil, Pavlína Ruleová, and Karel Knížek</i>	
Surface roughness evaluation of the formed parts produced by the multi-pass cold metal spinning applying laser textured tool	64
<i>Jana Šugárová, Peter Šugár, and Martin Frnčík</i>	
CFD analysis of damping characteristics of a hydraulic damper through geometrical modification and velocity variation	65
<i>Thaer Syam, Mohamed Arab, Ahmad Gamil, Yousif Badri, and Saud Ghani</i>	
Effect of heat treatment on the internal damping of magnesium alloys	66
<i>Milan Uhríčik, Peter Palček, Silvia Hudecová, Veronika Chvalníková, Martin Slezák, and Martin Mikolajčík</i>	
Statistical evaluation of the influence of plasma polishing parameters on the material removal rate and the cutting edge radius sizes	67
<i>Tomáš Vopát and Štefan Podhorský</i>	
Comparison of optical measurement methods utilization for complex high feed tool geometry	68
<i>Marek Vozár, Jakub Hrbál, Róbert Straka, and Ján Milde</i>	
Evaluating surface quality of heterogeneous surfaces produced by non-conventional machining technologies: methodological advances and challenges	69
<i>Hana Vrbová, Ondřej Bílek, Vladimír Pata, Miroslav Marcaník, Jana Knedlová, and Cyril Hořava</i>	

New insight into the gas-sensing properties of β -Ga ₂ O ₂ nanowires by near-ambient pressure XPS	70
<i>Roman Yatskiv, Michael Vorochta, Nikola Bašinová, Thu Ngan Dinhová, Jaroslav Maixner, and Jan Grym</i>	
Electrochemical characteristics of austenitic stainless steel after different times of sensitization	71
<i>Viera Zatkalíková, Lenka Markovičová, Martin Slezák, and Milan Uhrčík</i>	
Transport properties deviation of polycrystalline Bi ₂ O ₂ Se: Causes and solutions	72
<i>Jan Zich, Antonín Sojka, Jiří Navrátil, Karel Knížek, and Čestmír Drašar</i>	
Author index	77
List of Participants	81

PROGRAM

Monday, 9 September 2024

12:00 – 15:00 Registration (Hotel Lounge)

15:00 – 15:10 Opening (Lecture Hall)

15:10 – 16:30 **Monday Session 1**

Location: Lecture Hall

(chairperson: Mária Behúlová, Milan Nad’)

15:10 – 15:50 Jan Džugan
AM deposited metallic materials mechanical properties assessment with the use miniaturized samples

15:50 – 16:10 Monika Losertová
Influence of specimen dimensions on tensile behavior of NiTi alloy

16:10 – 16:30 Maroš Martinkovič
Measuring the toughness of weld joints on a tensile test machine.

16:30 – 17:00 Coffee break

17:00 – 18:30 **Monday Session 2**

Location: Lecture Hall

(chairperson: Zdeněk Kožíšek, Roman Yatskiv)

17:00 – 17:20 Zdeněk Remeš
Nanosecond photoluminescence decay in Mo-doped ZnO nanorods observed by TCSPC and phase shift methods

17:20 – 17:40 David John
Influence of annealing on Raman and photoluminescence spectra of single crystal ZnO

17:40 – 18:00 Radim Novák
Theoretical modelling of the frequency-dependent phase shift between-emission and excitation in ZnO nanorod photoluminescence spectra

18:00 – 18:20 Zdeněk Potůček
Effect of sample illumination on the content of luminescence active defects in $\text{Sn}_2\text{P}_2\text{S}_6$ crystals

18:30 – 19:30 Dinner

20:15 – 22:00 Welcome party (Hotel Restaurant)

Tuesday, 10 September 2024

08:40 – 10:00 **Tuesday Session 1**

Location: Lecture Hall

(chairperson: Zdeněk Remeš, David John)

- 08:40 – 09:00 Roman Yatskiv
New insight into the gas-sensing properties of β -Ga₂O₂ nanowires by near-ambient pressure XPS
- 09:00 – 09:20 Tomáš Hostinský
Silver borophosphate glasses modified with tungsten and molybdenum oxide
- 09:20 – 09:40 Jan Zich
Transport properties deviation of polycrystalline Bi₂O₂Se: Causes and solutions
- 09:40 – 10:00 Antonín Sojka
Thermoelectric properties of doped Bi₂O₂Se
- 10:00 – 10:30 Coffee break

10:30 – 12:30 **Tuesday Session 2**

Location: Lecture Hall

(chairperson: Maroš Martinkovič, Tomáš Vopát)

- 10:30 – 10:50 Jana Knedlová
The effect of moisture on laser beam wood machining
- 10:50 – 11:10 Hana Vrbová
Evaluating surface quality of heterogeneous surfaces produced by non-conventional machining technologies: methodological advances and challenges
- 11:10 – 11:30 Ondřej Bílek
The impact of surface roughness of replaceable cutting inserts treated with MRF technology on the turning process
- 11:30 – 11:50 Milena Kubišová
Analysis of measurement uncertainties in mechanical production and subsequent use for process stability control
- 11:50 – 12:10 Miroslava Puchoňová
Polymorphism of methylsalicylatocopper(II) complexes
- 12:10 – 12:20 Martin Cyprich
Hermes LabSystems - provider of solutions for laboratories
- 12:20 – 12:30 Miroslav Kamenský
TESTOVACÍ TECHNIKA s.r.o. - company presentation

12:30	–	13:30	Lunch
14:00	–	15:00	<hr/> Tuesday Session 3 <hr/> <i>Location: Lecture Hall</i> <i>(chairperson: Monika Losertová, Miroslava Puchonová)</i>
14:00	–	14:20	Ivona Černíčková <i>Comparison of experimental and thermodynamic approaches in the study of Ga-enriched SAC305 lead-free solders</i>
14:20	–	14:40	Libor Ďuriška <i>Structural and thermodynamic studies of SAC108 lead-free solders enriched with Ga</i>
14:40	–	15:00	Tereza Machajdíkova <i>Impact of nickel addition on the phase composition and properties of Sn-Ag-Cu solder alloys</i>
15:00	–	15:30	Coffee break
15:30	–	18:10	<hr/> Tuesday Session 4 <hr/> <i>Location: Lecture Hall</i> <i>(chairperson: Peter Šugár, Libor Ďuriška)</i>
15:30	–	16:10	Shelley Anne Lorimer <i>Using a Compositional Thermal Reservoir Simulator (STARS) to Examine Mechanisms and Scaling of Enhanced Oil Recovery Processes</i>
16:10	–	16:30	Martin Podhorský <i>Site-controlled growth of InGaAs quantum dots with buried stressor for the development of microlasers and quantum light sources</i>
16:30	–	16:50	Boris Pätoprstý <i>Surface modification of additively manufactured parts by drag finishing</i>
16:50	–	17:10	Vladimír Šimna <i>The impact of generator parameters on cutting width in machining nickel alloys using WEDM technology</i>
17:10	–	17:30	Marek Vozár <i>Comparison of optical measurement methods utilization for complex high feed tool geometry</i>
17:30	–	17:50	Tomáš Vopát <i>Statistical evaluation of the influence of plasma polishing parameters on the material removal rate and the cutting edge radius sizes</i>
17:50	–	18:10	František Jurina <i>Monitoring of selected aspects during the plasma polishing of cemented carbide end mills</i>
18:30	–	19:30	Dinner

Wednesday, 11 September 2024

09:00 – 11:30 Current Trends in Teaching Technical Subjects: A Panel Discussion
Location: Lecture Hall

12:30 – 13:30 Lunch

14:00 – 15:30 Membership meeting of the Slovak Expert Group of Solid State Chemistry and Physics
Location: Lecture Hall

16:00 – 17:00 Joint meeting of the Slovak Expert Group of Solid State Chemistry and Physics and CSACG
Location: Lecture Hall

18:00 – 19:30 Dinner

Thursday, 12 September 2024

08:30 – 10:10 **Thursday Session 1**

Location: Lecture Hall

(chairperson: Jana Šugárová, Milena Kubišová)

- 08:30 – 08:50 Milan Uhrčík
Effect of heat treatment on the internal damping of magnesium alloys
- 08:50 – 09:10 Milan Uhrčík
Effect of structure on the fatigue properties of aluminum casting alloys
- 09:10 – 09:30 Viera Zatkalíková
Electrochemical characteristics of austenitic stainless steel after different times of sensitization
- 09:30 – 09:50 Lenka Markovičová
Assessment of the suitability and durability of a recycled polymer product as a building component
- 09:50 – 10:10 Daniel Ďugel
Modern composites in transportation constructions
- 10:10 – 10:40 Coffee break

10:40 – 12:20 **Thursday Session 2**

Location: Lecture Hall

(chairperson: Robert Král, Tomáš Hostinský)

- 10:40 – 11:00 Vladimír Kuchtanin
The journey of nickel
- 11:00 – 11:20 Alexandra Kucmanová
Let's reveal the secrets of chemistry in the environment to children
- 11:20 – 11:40 Marek Kudláč
Influence of final turning on SCC susceptibility and corrosion properties of austenitic stainless steel 08Ch18N10T
- 11:40 – 12:00 Jaroslava Maroszová
Efficiency of selected sorbents for eliminating PCBs from soil
- 12:00 – 12:20 Margita Ščasná
Biochars from Cardboard as an Alternative Adsorbent for the Removal of Pesticides from the Water Environment
- 12:30 – 13:30 Lunch

14:00	–	15:20	Thursday Session 3
			<i>Location: Lecture Hall</i>
			<i>(chairperson: Zdeněk Potůček, Vladimír Kuchtanin)</i>
14:00	–	14:20	Zdeněk Kožíšek <i>Homogeneous versus heterogeneous nucleation in aluminum droplet at low supercooling: nucleation rates and the total number of nuclei</i>
14:20	–	14:40	Robert Král <i>Study of thermochromic materials and their properties for visual indicators</i>
14:40	–	15:00	Kateřina Křehlíková <i>Ternary lithium manganese (II) chloride as a new red-emitting neutron scintillator</i>
15:00	–	15:20	Juraj Kajan <i>Improving the efficiency of crystal growth process control by HDC method</i>
15:20	–	15:50	Coffee break
15:50	–	17:50	Thursday Session 4
			<i>Location: Lecture Hall</i>
			<i>(chairperson: Ondřej Bílek, Viera Zatkalíková)</i>
15:50	–	16:10	Jana Šugárová <i>Surface roughness evaluation of the formed parts produced by the multi-pass cold metal spinning applying laser textured tool</i>
16:10	–	16:30	Richard Antala <i>Roughness and wettability of the Ti Grade 2 surfaces modified by nanosecond laser</i>
16:30	–	16:50	Filip Ferenčík <i>Impact of sputtering power on trace impurities in binary oxides: A ToF-ERDA characterization study</i>
16:50	–	17:10	Matej Kubiš <i>Effects of high fluence helium ion irradiation on the micromechanical properties of Eurofer97 and ODS Eurofer steels</i>
17:10	–	17:30	Diana Fabušová <i>Theoretical investigation and DFT modelling of novel Pd₂O polymorphs using educated guess and evolutionary algorithms</i>
17:30	–	17:50	Radovan Bujdák <i>Exploring novel phases in the nickel-oxygen binary system with evolutionary algorithms and density functional theory modeling</i>
19:30	–	24:00	Conference banquet (Hotel Restaurant)

Friday, 13 September 2024

09:00 – 10:00 **Friday Session 1**

Location: Lecture Hall

(chairperson: Ivona Černíčková, Lenka Markovičová)

- 09:00 – 09:20 Milan Nad' *Analysis of the influence of geometric and material parameters of fixing edge layers on the modal properties of plate structures.*
- 09:20 – 09:40 Rastislav Ďuriš *The determination of basic material properties using DIC*
- 09:40 – 10:00 Eva Labašová *Methods for determining reliability of complex systems*
- 10:00 – 10:30 Coffee break

10:30 – 12:00 **Friday Session 2**

Location: Lecture Hall

(chairperson: Rastislav Ďuriš, Jaroslava Maroszová)

- 10:30 – 10:40 Ivo Říha *CEDEG - a partner for your business, research and innovations*
- 10:40 – 11:00 Melánia Feszterová *Interdisciplinary education of chosen parts of natural sciences for pre-service teachers*
- 11:00 – 11:20 Thaer Syam *CFD analysis of damping characteristics of a hydraulic damper through geometrical modification and velocity variation*
- 11:20 – 11:40 Eva Babalová *Numerical simulation of dissimilar laser welding of titanium and AISI304 steel parts*
- 11:40 – 12:00 Mária Behúlová *Modelling and numerical simulation of temperature fields during WAAM production of an aluminium part*
- 12:00 – 12:10 Closing

ABSTRACTS

Roughness and wettability of the Ti Grade 2 surfaces modified by nanosecond laser

Richard Antala, Peter Šugár, Jana Šugárová, and Michal Moško

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

Surface characteristics of the materials dedicated to application in a biological environment play an important role. Chemical and phase composition, surface morphology and roughness determine the processes on the interface implant-surrounding bone, therefore many researchers are looking for optimal implant's surface integrity with an emphasis on micro and nano roughness alternation, in combination with the improved thickness of passivation layer and enhanced surface energy [1 - 4]. One of many ways how to improve the surface properties of materials for biomedical applications is laser structuring [5]. In this study, the impact of laser structuring parameters on the surface roughness and wettability of flat Ti Grade 2 surfaces was examined. Five experimental surfaces were prepared applying different levels of laser pulse energy maintaining the constant value of the scanning speed and five surfaces were prepared using various values of scanning speed while keeping the pulse energy constant. The surface morphology was documented employing high-resolution digital microscopy followed by the surface roughness parameters measurement using the contact profilometer. Finally, the surface wettability was measured using the sessile drop technique [6]. Experimental results confirmed a tendency of the surface contact angle to increase with the increase of the scanning speed, which corresponds with the trend of surface roughness parameters R_{sk} and R_{ku} to be higher when the scanning speed is increased. An opposite tendency of the contact angle decrease was observed with the rise of the laser pulse energy. It is consistent with the trend of a slight decrease in the surface profile kurtosis R_{ku} when the pulse energy grows.

This research was supported by the VEGA project 2/0054/23, the KEGA project 026STU-4/2023, and the project TIBLAS, solved under the STU Grand Scheme for Support of Young Researchers.

- [1] V. Veiko et al., *Nanomaterials* 12, 23 (2022), 4229.
- [2] K. Rafiee, H. Naffakh-Moosavy, E. Tamjid, *Mater. Sci. Eng. C* 109 (2020), 110637.
- [3] N. Eghbali, H. et al., *Dent. Mater.* 37, 3 (2021), pp. 547 – 558.
- [4] N. Sirdeshmukh and G. Dongre, *Results Eng.* 17 (2023), 100898.
- [5] H. Li et al., *Int. J. Adv. Man. Tech.* 119, 9 – 10, (2022), pp. 5993 – 6005.
- [6] M. Moško, *Modification of functional properties of surfaces by laser micromachining. (Master Thesis) Trnava: MTF STU (2024).*

Numerical simulation of dissimilar laser welding of titanium and AISI304 steel parts

Eva Babalová and Mária Behúlová

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

Laser welding of titanium Grade 2 and AISI304 steel parts is commonly used in industries such as aerospace, automotive. These two metals have unique characteristics that make them ideal for various applications, but their differences in thermal conductivity, melting points, and chemical composition make achieving a strong and durable joint challenging [1]. Numerical simulation plays a crucial role in understanding and optimizing the laser welding process. By using numerical simulation is possible predict the behavior of the weld pool, heat distribution, and residual stresses in the welded material. This allows for the optimization of process parameters such as laser power, welding speed, and focal spot size to achieve better weld quality and efficiency [2]. This article focuses on analysing the temperature fields during the laser welding of 2 mm thick plates of AISI 304 steel and Ti Grade 2 through numerical simulations using ANSYS software. A simulation model for producing butt joints was developed to evaluate the impact of laser welding parameters, including laser power, welding speed, and laser beam offset towards the AISI 304 side, on temperature distribution and weld-pool characteristics. The laser heat source was modeled using a conical model with a Gaussian distribution of laser beam power. Material properties of AISI 304 steel and Ti Grade 2 were calculated as a function of temperature using JMatPro software. Cooling of the welding plates via convection and radiation with the argon shielding gas and surrounding air was applied using a third-kind boundary condition. Subsequently, the simulation model was employed to design appropriate technological parameters for laser welding these dissimilar metals. Using the DoE (Design of Experiment), the influence of technological parameters such as welding speed and laser power on the size of the melted zone on the top and bottom of the weld was analyse. An optimization was carried out, on the basis of which the area of optimal parameters for creating a weld with good quality was designed [3].

This research has been supported by the Scientific Grant Agency of the Slovak Republic within the KEGA 035 STU-4/2024, VEGA Project No. 1/0287/21.

- [1] S. Chen et al., Materials and Design 53, 504-511 (2014).
- [2] Y. Zhang et al., J. Mater. Res. Technol. 9(1), 465-477 (2020).
- [3] D. C. Montgomery, Design and Analysis of Experiments, eighth ed., John Wiley & Sons, Inc., Hoboken, 2017

Modelling and numerical simulation of temperature fields during WAAM production of an aluminium part

Mária Behúlová¹, Eva Babalová¹, Miroslav Sahul^{1,2}, Martin Sahul¹, Marián Pavlík¹, and Tomáš Němec²

¹*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

²*Czech Technical University in Prague, Faculty of Mechanical Engineering, Technická 4, 166 07 Praha 6, Czech Republic*

Wire arc additive manufacturing (WAAM) is a notably promising direct energy deposition (DED) technology for the production of large-scale metallic components of various shapes without the need for complex tooling, molds, or dies. The main advantages of this technology include high material efficiency, lead time reductions, a high deposition rate, and low production costs [1-2]. WAAM offers numerous benefits for a wide range of metallic materials, including metals with high reflectivity like aluminum, copper, and magnesium, and their alloys [2-4]. The paper investigates the thermal cycles and temperature fields that develop during the additive manufacturing of an AA5087 aluminum alloy part using conventional Cold Metal Transfer (CMT) with varying deposition parameters. Thermal cycles were experimentally measured using an Ahlborn Almemo 5690-2 measuring station equipped with K-type thermocouples, while temperature fields were captured with a FLIR E95 infrared camera. A simulation model of the deposition process was developed to study the effect of deposition parameters on temperature distribution and the geometrical characteristics of weld beads. Results from numerical simulations using ANSYS software were compared with the macrostructural features and weld bead dimensions in single layers.

The research was supported by the Scientific Grant Agency of the Slovak Republic within the VEGA Projects No. 1/0287/21 and and KEGA Project No. 1/0769/24.

- [1] Y. Li, Ch. Su and J. Zhu, Results Eng. 13 (2022) 100330.
- [2] H Pant et al. Int. J. Adv. Manuf. Technol. 127 (2023) 4995–5011.
- [3] K E K Vimal, M Naveen Srinivas and S Rajak, Mater. Today Proc. 41 (2021) 1139.
- [4] M. Maleta et al. Materials 17 (2024) 50.

The impact of surface roughness of replaceable cutting inserts treated with MRF technology on the turning process

Ondřej Bílek¹, Jan Zlámal¹, Jana Knedlová¹, and Hana Vrbová^{1,2}

¹*Tomas Bata University in Zlín, Faculty of Technology, Vavrečkova 5669, 76001 Zlín, Czechia*

²*Department of Plastics and Rubber, Institute of Polymer Materials, Faculty of Chemical and Food Technology, Slovak University of Technology in Bratislava, Radlinského 9, 811 07 Bratislava, Slovakia*

This work investigates the effect of the surface roughness of uncoated replaceable cutting inserts (RCIs) on the turning process. The surface of the RCIs was modified using sandblasting and magnetorheological finishing (MRF) technology, and the results were compared with the original untreated surface. The experimental research was conducted on DMG Mori's NTX 1000 turn-mill center, where cutting forces were measured using a Kistler 9129AA dynamometer and analyzed using Dynaware software. The results showed that the roughness of RCI significantly affected the final workpiece quality, cutting forces and chip compression coefficient. The MRF-treated RCI showed lower cutting forces and better workpiece surface quality. In addition, MRF technology allows for more precise control of surface roughness and quality. Therefore, optimizing RCI roughness is critical for efficient and energy-saving turning operations.

This work and the project were realized with the financial support of the internal grant of TBU in Zlín No. IGA/FT/2024/002, financed from the resources of specific university research.

Exploring novel phases in the nickel-oxygen binary system with evolutionary algorithms and density functional theory modeling

Radovan Bujdák¹, Diana Fabušová¹, Kamil Tokár^{1,2}, and Mariana Derzsi¹

¹*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology in Trnava, Advanced Technologies Research Institute, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia 917 24 Trnava, Slovakia*

²*Institute of Physics, Slovak Academy of Sciences, 845 11 Bratislava, Slovakia*

Transition metal oxides present a vast array of materials with innumerable technical and chemical applications. Recently, binary oxides of nickel have attracted significant attention due to their emergence as a family of new superconducting materials, as well as their relevance in various industrial processes, such as metallurgy, catalysis, and semiconductor fabrication. Known binary nickel oxides have a wide application area, and the prediction and description of new phases in Ni-O binary system might uncover new attractive and functional materials. In our work, we explore and characterize either completely unknown or poorly characterized phases in binary transition metal oxide system Ni-O. We utilize a methodology that integrates state-of-the-art approaches such as Density Functional Theory (DFT) calculations in combination with Evolutionary Algorithms (EA) for the theoretical prediction of structures of new phases. We focus on analyzing crystal chemistry across various stoichiometries within the Ni-O binary system, examining large datasets generated by EA+DFT to uncover statistical patterns, relationships, and preferences in the data. Our findings contribute to a deeper fundamental understanding of the nickel-oxygen binary system.

This work was supported by Project No. SK-SRB-23-0035 - A synergy of ion beam methods and 2D materials with bulk and nano systems for energy and sensing applications. Presented research results were largely obtained using the computational resources procured in the national project National competence centre for high performance computing (project code: 311070AKF2) funded by European Regional Development Fund, EU Structural Funds Informatization of society, Operational Program Integrated Infrastructure.

Comparison of experimental and thermodynamic approaches in the study of Ga-enriched SAC305 lead-free solders

Ivona Černíčková, Libor Ďuriška, Marián Drienovský, Tereza Machajdíková, Michaela Halmanová, and Roman Čička

Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia

The aim of the work was the study of lead-free solders SAC305 alloyed with gallium and comparison of experimental and thermodynamic approaches. In the experimental investigation, scanning electron microscopy, energy-dispersive X-ray spectroscopy, X-ray diffraction and differential scanning calorimetry were used. It has been observed that with the addition of gallium in the solders, the thermal properties of the solders are improved. Also at low gallium content, a refinement of the microstructure was observed. However, at high gallium content, the exclusion of the inappropriate gallium-rich phase was found. The experimental results are compared to thermodynamic calculations of the Sn-Ag-Cu-Ga system obtained using the Thermo-Calc software.

This work was supported by the Grant Agency VEGA (1/0389/22) and Slovak Research and Development Agency (APVV-20-0124).

Hermes LabSystems - provider of solutions for laboratories

Martin Cyprich

Hermes LabSystems s.r.o., Púchovská 12, Bratislava, Slovakia

Hermes LabSystems is a provider of leading-edge solutions for laboratories in analytical chemistry, cell and molecular biology, genomics, diagnostic pathology, thermal analysis and other disciplines. The company was founded in 1996 to distribute products from the former Analytical Chemistry Division of Hewlett-Packard. At the time, no one knew that after only a few years of existence, we would become a major player in the analytical chemistry technology market and later in molecular biology, genomics and diagnostic pathology. As an official representative of the world's leading manufacturers, we supply instruments, equipment and consumables for laboratories and provide support and consulting, equipment rental, training, after-sales service, metrology and other services. In August 2021, Hermes LabSystems became co-owner of the third largest distributor of laboratory supplies in Europe, Lab Logistic Group, GmbH (LLG), based in Meckenheim, Germany. LLG is a company with more than 50 years of history, during which time it has earned a leading position in the distribution of laboratory supplies. Our positive and motivated team has extensive knowledge and experience. Combined with the unique technologies of our partners, this enables us to reliably help our customers achieve the highest quality results. Our approach to the market is defined by innovation, flexibility, quality and customer focus. Our goal is to serve public and private clients at the highest possible level and with the highest expertise to become the best in their field. www.hermeslab.sk

Modern composites in transportation constructions

Daniel Ďugel and Lenka Lapašová

University of Žilina, Faculty of Civil Engineering, Department of Structural Mechanics and Applied Mathematics, Univerzitná 8215/1, 010 26 Žilina, Slovak Republic

The large variety of existing modern composite materials and products on the construction market provides a number of possibilities for their use. However, at the same time the world is facing many challenges due to the daily deterioration of the environment and the depletion of non-renewable resources. New technologies and materials are being sought to combat these issues. As one of possible solutions is the innovative use of polymers in transport construction. This paper focuses on the investigation of the material properties of two different materials (hybrid composite and foam concrete). The main idea of the research is the development of new composite materials with higher strength and durability compared to traditional types of materials used on construction site.

The determination of basic material properties using DIC

Rastislav Ďuriš and Eva Labašová

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

In determining the basic material properties, in recent years contact the strain gauge techniques of deformation measurements are often replaced by non-contact deformation measurement techniques. Digital image correlation (DIC) is currently one of the most popular non-contact optical method. The robust computational correlation algorithms developed so far allow a sufficiently accurate description of the movement of material points during the deformation of the tested sample. They effectively provide an estimate of the distribution of deformation field. For this reason, the relatively simple optical DIC method is widely used to estimate displacements and deformations in various applications: material characteristic investigation, structural condition monitoring, fatigue crack growth tracking, high temperature testing, etc. The adaptability of the DIC technique lies in the technology of image capture by standard cameras, applicability to a wide range of dimensions and materials of the tested samples and constructions. The contribution is focused on the use of the open source MATLAB 2D DIC software Ncorr [1] to evaluate the deformations of the test sample during the static tensile test. Tensile tests were carried out on flat samples made in different dimensions and with different materials. The influence of selected parameters of the correlation algorithm in the settings of the Ncorr program on the estimation of deformations was evaluated. The results of uniaxial strains obtained by the DIC method were verified by experimental measurements using an installed strain gauge and a reference extensometer. Subsequently, the basic parameters of the material of the samples were determined: Young's modulus of elasticity and Poisson's ratio.

This work was supported by the Slovak Cultural and Educational Grant Agency KEGA within the project No. 035STU-4/2024.

- [1] Blaber, J., Adair B., Antoniou, A. (2015) Ncorr: Open-Source 2D Digital Image Correlation Matlab Software, *Experimental Mechanics* 55:1105–1122

Structural and thermodynamic studies of SAC108 lead-free solders enriched with Ga

Libor Ďuriška, Ivona Černíčková, Marián Drienovský, Michaela Halmanová, and Martin Kusý

Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia

In recent years, lead-free solders based on Sn-Ag-Cu (SAC) have been considered as the most promising alternative to Sn-Pb solders [1,2]. The most preferred candidates used in industry are SAC387 (95.5 wt.% Sn, 3.8 wt.% Ag, and 0.7 wt.% Cu) and SAC 305 (96.5 wt.% Sn, 3.0 wt.% Ag, and 0.5 wt.% Cu) [1]. However, there is a tendency to reduce the overall cost of the solder by reducing the Ag content. Despite the fact that a lot of work has been done in recent years, properties of lead-free solders have not been fully optimized compared to lead-based solders [3]. However, it was found that additional alloying elements (e.g., Ga, In, Bi, Ni) can lower the melting temperature and optimize the thickness and morphology of the intermetallic compound (IMC) layer [4-6]. Considering the above facts, this work is focused on the study of SAC108 (98.2 wt.% Sn, 1.0 wt.% Ag, and 0.8 wt.% Cu) enriched with Ga. The main aim is to study the influence of Ga on structural, thermal, and mechanical properties of SAC using scanning electron microscopy (SEM), energy-dispersive X-ray spectroscopy (EDX), X-ray diffraction (XRD), differential scanning calorimetry (DSC), and Vickers hardness testing (HV1). The phase composition and morphology is discussed. The hardness and melting point of studies solders are evaluated. The effect of the Ga addition is also discussed in terms of thermodynamic calculations performed by the Thermo-Calc software.

This work was supported by the Grant Agency VEGA (1/0389/22) and Slovak Research and Development Agency (APVV-20-0124).

- [1] D. Zhou, A.S.M.A. Haseeb, and A. Andriyana, *Mater Today Commun.* 33 (2022) 104430.
- [2] W. R. Osório, L. C. Peixoto, L. R. Garcia, N. Mangelinck-Noël, and A. Garcia, *J. Alloys Compd.* 572 (2013) 97-106.
- [3] M.A. Fazal, N.K. Liyana, S. Rubaiee, and A. Anas, *Measurement* 134 (2019) 897-907.
- [4] J. Zhao, L. Qi, X. Wang, and L. Wang, *J. Alloys Compd.* 375 (2004) 196-201.
- [5] K.S. Kim, S.H. Huh, and K. Suganuma, *Microelectron. Reliab.* 43 (2003) 259-267.
- [6] P. Sivakumar, K. O'Donnell, and J. Cho, *Mater. Today Commun.* 26 (2021) 101787.

AM deposited metallic materials mechanical properties assessment with the use miniaturized samples

Jan Džugan

COMTES FHT a.s., Prumyslova 995, Dobruška, Czechia

Additive manufacturing (AM) has seen a dramatic surge in interest, necessitating precise characterization of mechanical properties for its successful integration into engineering structures. It is well-established that the mechanical behavior of AM-produced components is highly sensitive to deposition parameters such as location, orientation, and wall thickness, resulting in substantial property variations. Moreover, the size dependency and surface quality of AM parts significantly impact their mechanical performance, rendering standard test samples often unsuitable. While miniaturized samples are undergoing standardization for tensile testing, there remains a critical gap in methodologies for fatigue, fracture toughness, and creep evaluations. This paper provides a comprehensive overview of mini-sample utilization for these tests and outlines ongoing standardization efforts in this field.

All activities at COMTES FHT were supported by the Ministry of Industry and Trade of the Czech Republic under a research organization decision no. 3/2018.

Theoretical investigation and DFT modelling of novel Pd₂O polymorphs using educated guess and evolutionary algorithms

Diana Fabušová¹, Radovan Bujdák¹, Kamil Tokár^{1,2}, and Mariana Derzsi¹

¹*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology in Trnava, Advanced Technologies Research Institute, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

²*Institute of Physics, Slovak Academy of Sciences, 845 11 Bratislava, Slovakia*

Transition metal oxides represent a significant category of materials with wide-ranging applications in technical and chemical fields. Among these, binary oxides of palladium have recently attracted significant interest due to their exceptional catalytic properties [1], particularly in industries such as automotive, pharmaceutical, and agriculture. Despite their importance, palladium oxides remain poorly characterized, with only PdO [2] and PdO₂[3] being well-recognized. In this study, we focus on the challenging task of identifying and characterizing new phases within binary palladium oxides, specifically Pd₂O. Utilizing a strategy that combines Density Functional Theory (DFT) calculations with educated guesses and evolutionary algorithms, we aim to predict and explore the structure of Pd₂O. Palladium oxide, Pd₂O has been only identified in ultrathin palladium films and cuprite structure with space group *Pn-3m* was proposed [4]. However, it was not further characterized and its properties remain unknown. Therefore, in order to gain deeper insights into the properties of Pd₂O we have calculated crystal, electronic and phonon structure of the reported cubic Pd₂O phase and evaluated its thermodynamic stability using Density Functional Theory. Additionally, in combination with evolutionary algorithms for crystal structure prediction we have proposed other potential new polymorphs of Pd₂O. Our results show that Pd₂O can form various polymorphs with more favorable formation enthalpy than previous reported cuprite structure. This study not only advances the understanding of Pd₂O but also demonstrates the effectiveness of integrating theoretical methods in the exploration of poorly characterized transition metal oxides.

Research results was obtained using the computational resources procured in the national project National competence centre for high performance computing (project code: 311070AKF2) funded by European Regional Development Fund, EU Structural Funds Informatization of society, Operational Program Integrated Infrastructure.

- [1] K. Ament et al., ACS Catal. 11 (2021) 2754.
- [2] J. Waser, H. A. Levy, S. W. Peterson, Acta Cryst. 6 (1953) 661.
- [3] I. S. Shaplygin, G. L. Aparnikov, V. B. Lazarev, Russ. J. Inorg. Chem. 23 (1978) 488.
- [4] J. Kumar, R. Saxena, J. Less-Common Met. 147 (1989) 59.

Impact of sputtering power on trace impurities in binary oxides: A ToF-ERDA characterization study

Filip Ferenčík, Jozef Dobrovodský, Zoltán Száraz, and Pavol Noga

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Advanced Technologies Research Institute, Ulica Jána Bottu č. 2781/25, 917 24
Trnava, Slovakia*

Performance of Binary oxides, used especially in the semiconductor industry, are significantly affected by impurity concentrations. Power density is one of the sputtering parameters that significantly affects these impurities. Increasing the power density reduces the amount of contaminants in the thin film metals. This study examines how power density in magnetron sputtering impacts hydrogen, carbon, and other impurities in silicon, titanium, copper, silver, and palladium binary oxides, which are common in the semiconductor industry and needed further investigation for comparison with metals. We focused on a narrow power density range of 200-300W using DC reactive magnetron sputtering on a 3-inch target. Six samples of each material were prepared under fixed conditions of 5×10^{-3} mbar pressure in an Argon and Oxygen atmosphere with a flow rate of 40/10 sccm. Data analysis was performed on films of the same thickness, ignoring the surfaces of both the substrate and the film. Using Time-of-Flight Elastic Recoil Detection Analysis (ToF-ERDA), we detected very low but important changes in impurity concentrations and understood how they relate to the sputtering power density. The results offer new insights into optimizing deposition parameters to improve film purity and performance.

The Slovak Research and Development Agency, grant No. APVV-20-0220.

Interdisciplinary education of chosen parts of natural sciences for pre-service teachers

Melánia Feszterová

Constantine the Philosopher University in Nitra, Tr. A. Hlinku 1, Nitra, Slovakia

Abstract

Silver borophosphate glasses modified with tungsten and molybdenum oxide

Tomáš Hostinský, Petr Mošner, and Ladislav Koudelka

University of Pardubice, Faculty of Chemical Technology, Department of General and Inorganic Chemistry, Studentská 573, Pardubice 532 10, Czech Republic

This contribution deals with study of mixed glass former effect (MGFE) and its effects in two series of borophosphate glasses of $40\text{Ag}_2\text{O}-20\text{MO}_3-(40-x)\text{P}_2\text{O}_5-x\text{B}_2\text{O}_3$ (where $\text{M} = \text{W}, \text{Mo}$) in a composition range of $x = 0-30$ mol% B_2O_3 . Basic physico-chemical properties were determined, and thermal properties studied by differential thermal analysis and thermomechanical analysis. The glass structure was investigated using Raman spectroscopy and both 1D and 2D ^{11}B and ^{31}P MAS NMR spectroscopy. Behavior and oxidation states of tungsten and molybdenum throughout the series was investigated using EPR spectroscopy. The electrical properties of the glasses were obtained by using impedance spectroscopy. In both series, glass transition temperature, T_g , increases in range of 0-10 mol% B_2O_3 , further additions results in slight decline of T_g values. Results from impedance spectroscopy reveal non-linear increase in DC conductivity which can be attributed to MGFE and therefore changes in the structure of the glass network. The second possible explanation of the development in DC conductivity can be attributed to the presence of reduced forms of W and Mo which can affect the resulting conductivity by the polaron hopping phenomenon. This phenomenon has already been studied and confirmed on glasses of similar systems [1]. Structure of the glasses was probed with multiple MAS NMR experiments. To get first information about the glass network, standard 1D experiments of ^{11}B and ^{31}P nuclei were performed. From obtained ^{31}P MAS NMR spectra is visible the transformation of the dominant phosphate structural units in the direction of $\text{Q}^2 \rightarrow \text{Q}^0$ with B_2O_3 additions, and thus the shortening of the phosphate chains. Development in ^{11}B MAS NMR spectra reveals presence of both BO_4 and BO_3 structural units through the series. Interconnections between phosphate and borate species was further studied by multiple 2D correlation techniques. Namely 2D ^{31}P INADEQUATE sequence was used to probe direct through bond connections between phosphate structure units, which confirmed shortening of phosphate chains. As next was done investigation of the P-O-B linkages using the $^{11}\text{B}(^{31}\text{P})$ D-HMQC sequence. This experiment confirmed presence of both P-O-B^[4] and P-O-B^[3] structure units connection inside the glass network. And lastly 2D ^{11}B DQ-SQ sequence was used to investigation of presence and nature of B-O-B bonds. This experiment reveals presence and evolution of all three $\text{BO}_3\text{-BO}_3$, $\text{BO}_3\text{-BO}_4$ and $\text{BO}_4\text{-BO}_4$ pairs inside the glass network. By combining all these methods, we were able to prepare an approximate structural model of these glasses, which could be used to explain the macroscopic properties of the studied glasses.

This work was supported by IR INFRANALYTICS FR2054 project.

[1] A. Šantić, J. Nikolić, S. Renka, et al., Solid State Ionics, 2022, 375, 115849.

Effect of structure on the fatigue properties of aluminum casting alloys

Silvia Hudecová, Milan Uhrčík, Peter Palček, Veronika Chvalníková, Zuzana Šurdová, and Lukáš Šikyňa

University of Žilina, Department of Materials Engineering, Univerzitná 8125/1, Žilina, Slovakia

Casting alloys are materials used for producing shape castings, specifically aluminum alloy products with intricate geometries. These alloys are increasingly prevalent and find numerous applications in modern industry [1]. Aluminum alloys are critical engineering materials extensively utilized in various fields such as automotive parts, aircraft components, wire ropes, and overhead electrical cables due to their high strength-to-density ratio. However, in these applications, aluminum alloys are also susceptible to fatigue damage [2]. Aluminum alloys used in the automotive industry must exhibit a suitable balance of strength and ductility. Sheets or profiles are typically formed into final shapes, such as body panels or bumper beams, through cold deformation. Therefore, bendability is crucial for both fabrication and application, where ductility ensures optimal energy absorption. While uniaxial tensile testing is commonly employed to determine the mechanical properties of metals, it may not accurately reflect the deformation modes experienced by a component. In such cases, the three-point bending test is a more appropriate method for assessing mechanical properties. Several factors influence bendability, including hardening behavior, constituent particles, shear band formation, microstructure, and texture/anisotropy [3]. The aim of this work is to study and analyze the properties of aluminum alloys for casting. The experimental measurement is aimed at material evaluation and fractographic analysis of fracture surfaces after three-point bending loading.

The research was supported by the Scientific Grant Agency of the Ministry of Education of Slovak Republic and Slovak Academy of Sciences, VEGA 01/0461/24, KEGA 004ŽU-4/2023, KEGA 016ŽU-4/2023, project APVV-20-0427 and project to support young researchers at UNIZA, the ID of project 12715.

- [1] M.V. Glazoff, V.S. Zolotarevsky, N.A. Belov, Casting Aluminum Alloys, Elsevier, The Netherlands (2007).
- [2] R. Sadeler, S. Atasoy, H. Altun, Metallic Materials 47 (2009) 95.
- [3] I. Westermann, K.E. Snilsberg, Z. Sharifi, O.S. Hopperstad, K. Marthinsen, B. Holmedal, Metal. and Mat. Tran. A 42 (2011) 3386.

Influence of annealing on Raman and photoluminescence spectra of single crystal ZnO

David John^{1,2,3}, Zdeněk Remeš¹, Radim Novák¹, Jakub Volf^{1,4}, Oleg Babčenko¹, Egor Ukraintsev⁵, Bohuslav Rezek⁵, and Maksym Buryi⁶

¹*Institute of Physics of the Czech Academy of Sciences, Na Slovance 1999/2, 182 00, Prague, Czech Republic*

²*Nuclear Physics Institute of the Czech Academy of Sciences, Na Truhlářce 39/64, 180 00, Prague, Czech Republic*

³*Faculty of Nuclear Sciences and Physical Engineering of the Czech Technical University, Břehová 7, 115 19, Prague, Czech Republic*

⁴*Department of Inorganic Chemistry University of Chemistry and Technology, Technická 5, 160 00, Prague, Czech Republic*

⁵*Faculty of Electrical Engineering of the Czech Technical University, Technická 2, 160 00, Prague, Czech Republic*

⁶*Institute of Plasma Physics of the Czech Academy of Sciences, U Slovanky 2525/1a, 182 00, Prague, Czech Republic*

Zinc oxide exhibits high electron mobility, wide 3.3 eV band gap, ability to sustain large electric fields, relative low electronic noise, and strong luminescence at room temperature. These properties make ZnO invaluable for a broad range of applications. It is therefore important to study the influence of treatment on its properties under various conditions. In this work we compare Fourier transform infrared Raman (FTIR Raman, 1064 nm laser excitation, 70-3500/cm spectral range, 1/cm spectral resolution) and photoluminescence (PL, 360 nm UV LED excitation, 375-700 nm spectral range, 1 ns time resolution) optical spectra of as the received and annealed ZnO single crystals. The annealing has been done in oxidizing and reducing atmosphere at 350, 500 and 700°C. The Raman spectra show two characteristic peaks at 100/cm and 440/cm associated with the sublattice oscillations of Zn and O, respectively, and a broad PL band in the visible spectrum with mean time decay about 10 microseconds. The optical measurements are correlated with the topographical information obtained by atomic force microscopy (AFM). We analyze trends in the optical spectra related to vacancy rearrangements in the lattice, and showed a possible next course of action for further research.

The work was supported by the Czech Science Foundation project 24-10607J, Ministry of Education, Youth and Sports of Czech Republic (MEYS) Danube project 8X23025 and the Mobility Plus project SAV-23-13 (CAS-SAS-2022-08) and the program “Strategy AV 21” of the Czech Academy of Sciences, specifically work package VP 27 Sustainable Energy (Renewable energy resources and distributed energy systems). This work has used the large research infrastructure CzechNanolab supported by the MEYS through the project No. LM2023051 and by the Operational Programme Johannes Amos Comenius (OP JAC) project financed by European Structural and Investment Funds (ESIF) and the Ministry of Education, Youth and Sports of Czech Republic (MEYS): SENDISO—CZ.02.01.01/00/22_008/0004596.

Monitoring of selected aspects during the plasma polishing of cemented carbide end mills

František Jurina, Tomáš Vopát, Štefan Podhorský, and Boris Pätoprstý

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

The article deals with the monitoring of selected characteristics of the plasma discharge process during the polishing of cemented carbide milling cutters. The aim of the experiment is to evaluate the change in current, voltage, temperature of the electrolyte and the cutting edge radius sizes with respect to the polishing time. These results bring new knowledge in the specific field of cutting edge preparation of cemented carbide milling cutters by plasma discharge in electrolyte

Improving the efficiency of crystal growth process control by HDC method

Juraj Kajan^{1,2}, Grigori Damazyan¹, Vira Tinkova³, Tomáš Gregor^{1,2}, Štefan Medvecký², and Mykhailo Chaika⁴

¹*AT Crystals s.r.o., Rosinská cesta 9, Zilina 010 08, Slovakia*

²*University of Žilina, Univerzitná 8215, 010 26, Žilina, Slovakia*

³*Research Centre UNIZA, University of Žilina, Univerzitná 8215/1, 010 26 Žilina, Slovakia*

⁴*Institute of Low Temperature and Structure Research, Polish Academy of Sciences, Okólna 2, 50-422 Wrocław, Poland*

In order to determine the stability of crystallization conditions, four experimental processes of sapphire crystal growth by the horizontal directional crystallization (HDC) method were carried out. The heater power was regulated based on real-time crystal-melt boundary position data obtained using video monitoring, which provided a stable crystal growth rate. The obtained curves of the dependence of the heater power on the length of the growing crystal indicate the similarity of physical phenomena regardless of the degree of melting of the seed crystal, the length of the container, and the effectiveness of thermal shielding. The analysis of the heat flow balance revealed that heat transfer from the heater is dependent on the melt surface area.

This work was supported by the Slovak Research and Development Agency under the contract No., APVV-19-0010, program for support of researchers threatened by the conflict in Ukraine - 09I03-03-V01-00097. Projects for the collaboration between organisations in the Slovak Republic and the Republic of Poland- SK-PL-23-003.

TESTOVACÍ TECHNIKA s.r.o. - company presentation

Miroslav Kamenský

TESTOVACI TECHNIKA s.r.o., Československé armády 923, Poděbrady, Czechia

Web site: <https://teste.sk/>

The effect of moisture on laser beam wood machining

Jana Knedlová, Milena Kubišová, Jakub Javořík, Hanka Vrbová, and Vojtěch Dušek

Tomas Bata University in Zlín, Vavrečkova 5669, Zlín, Czechia

Wood moisture can affect various parameters of the engraving process, such as the depth of engraving, the structure and surface of the wood, and thus the overall quality of the created image. The investigation of the influence of moisture contained in different types of wood on their machining was carried out on samples of oak, beech, pine, spruce, alder, ash and cherry produced using the laser device ILS 3NM, CO₂, with a wavelength of 10.6 μm and a maximum power 100 W, with a maximum feed speed of 1524 mms^{-1} . The depth of ablation and the surface of the machined surface were studied for selected samples with the moisture of the wood plants in the laboratory room, the outdoor and with the moisture created by immersion in the water bath.

This work and the project were realized with financial support from the internal grant of TBU in Zlin No. IGA/FT/2024/002, funded by the resources of specific university research.

Homogeneous versus heterogeneous nucleation in aluminum droplet at low supercooling: nucleation rates and the total number of nuclei

Zdeněk Kožíšek, Robert Král, and Petra Zemenová

Institute of Physics of the Czech Academy of Sciences, Cukrovarnická 10, 162 00 Praha 6, Czechia

Crystallization processes determine the quality of the product obtained and understanding the molecular mechanisms that occur during crystallization remains a scientific challenge. As a model system, we have chosen aluminum (Al), whose crystallization temperature $T_C \approx 642^\circ\text{C}$ (corresponding to an undercooling $\Delta T_C \approx 18.3^\circ\text{C}$) and can be well detected by differential scanning calorimetry (DSC) under non-isothermal conditions [1]. On the contrary, the crystallization event was repeatedly detected by the isothermal DSC after several tens of minutes at the undercooling $\Delta T \approx 6.8^\circ\text{C}$. The standard kinetic model of homogeneous and heterogeneous nucleation was solved numerically to determine the size distribution of the nuclei, the nucleation rate, and the total number of nuclei. In our previous analysis of Al crystallization via homogeneous nucleation, we have determined [1] the most probable values of the interfacial energy and the kinetic barrier of nucleation. Heterogeneous nucleation of Al on the concave droplet surface is modeled for the wetting angle $\vartheta = 90^\circ$ when the nucleation barrier of heterogeneous nucleation $W^{het} \approx 1/2$ of the homogeneous nucleation barrier W^{hom} and thus the probability of heterogeneous nucleation would be much higher than homogeneous one. On the other hand, the number of nucleation centers, where cluster formation starts, is much higher for homogeneous nucleation. As a result, the two nucleation processes are comparable in the Al sample of the mass 9.91 mg. Homogeneous nucleation starts at shorter times, but heterogeneous nucleation prevails in longer times.

- [1] Z. Kožíšek, R. Král, P. Zemenová: *Homogeneous nucleation and crystallization model of Aluminum droplet based on isothermal DSC analysis*, J. Therm. Anal. Calorim. 147 (2022) 13089–13098. <https://dx.doi.org/10.1007/s10973-022-11497-z>

Study of thermochromic materials and their properties for visual indicators

Robert Král¹, Lucin Fortin², Petra Zemenová¹, Morgane Poupon¹, Alex Nicaise², Jan Pavel Šafrata³, David Daniel Šafrata³, and Joris More Chevalier¹

¹*Institute of Physics, Czech Academy of Sciences, Cukrovarnicka 10, 162 00 Prague, Czechia*

²*Polytech Nantes, Rue Christian Pauc, CS 50609, 44306 Nantes Cedex3, France*

³*Gymnázium Evolution Sázavská, Sázavská 830/5, 120 00 Prague, Czechia*

Recently, chromogenic materials brought attention due to their wide application potential [1]. They belong into a broad family of functional materials containing discoloration substances and other auxiliary components, which change color when exposed to varying external conditions such as temperature, pressure, gas, etc. Specific group are the thermochromic materials, also called as temperature sensitive material(s), with unique color change occurring (reversibly or irreversibly) under thermal treatment [2]. Thus, these materials can be applied in scientific, industrial, and technological applications due to their ability to provide visual indication of thermal changes at specific environmental conditions or external influences. This may be used in aerospace, military, smart windows (to block solar radiation), printing technology, textile, architectural coatings, etc. [2,3]. However, the most significant application may be ascribed to food packaging and food safety, to monitor whether the food was properly stored while transported. Our main goal is to study selected thermochromic compounds based on Co- and Ni-phosphites to understand the mechanism behind their color properties and changes. However, due to their complex composition, which results in multiple transitions and decompositions at higher temperatures, we decided to firstly study thermochromic transitions on model compounds such as cobalt chloride hexahydrate ($\text{CoCl}_2 \cdot 6\text{H}_2\text{O}$) and nickel chloride hexahydrate ($\text{NiCl}_2 \cdot 6\text{H}_2\text{O}$). In this work we explored and analyzed properties of above mentioned model compounds using various thermoanalytical methods e.g. thermomicroscopy, simultaneous differential thermal analysis and thermogravimetry coupled with mass spectrometry, and thermomechanical analysis. Further, their structural and physical properties were investigated as well.

The work is supported by Operational Programme Johannes Amos Comenius financed by European Structural and Investment Funds and the Czech Ministry of Education, Youth and Sports (Project No. SENDISO – CZ.02.01.01/00/22_008/0004596).

- [1] D.K. Nguyen, Q.-V. Bach, J.-H. Lee, I.-T. Kim, *Materials* 11 (2018) 1693.
- [2] Y. Cheng, X. Zhang, C. Fang, J. Chen, Z. Wang, *J. Mater. Sci. Technol.* 34 (2018) 2225.
- [3] W. Yu, Y. Zhou, Z. Li, D. Zhu, L. Wang, Q. Lei, C. Wu, H. Xie, Y. Li, *Appl. Energy* 372 (2024) 123821.

Ternary lithium manganese (II) chloride as a new red-emitting neutron scintillator

Vojtěch Vaněček¹, Robert Král¹, Kateřina Křehlíková^{1,2}, Petr Průša^{1,3}, Romana Kučerková¹,
Vladimir Babin¹, Anton S. Tremsin^{4,5}, Petra Zemenová¹, Monika Kotyková^{1,3}, Jan
Rohlíček¹, Zuzana Málková¹, Terézia Jurkovičová¹, and Martin Nikl¹

¹*Institute of Physics of Czech Academy of Science, 162 00 Praha 6, Czechia, Cukrovarnická
112/10, Prague, Czechia*

²*Faculty of Chemistry and Technology, University of Chemistry and Technology in Prague,
Technická 5, Prague 16628, Czech Republic*

³*Faculty of Nuclear Sciences and Physical Engineering, Czech Technical University in
Prague, Břehova 7, 11519, Prague, Czech Republic*

⁴*Space Sciences Laboratory, University of California at Berkely, Berkeley, California 94720,
United States*

⁵*Lawrence Berkeley National Laboratory, Berkeley, California 94720, United States*

Neutron detectors play an important role in many application fields, such as nuclear power generation, nuclear decommissioning and decontamination, border and homeland security control, nuclear non-proliferation and medicine [1,2]. The current world source of ³He comes mostly from the decay of tritium originating in nuclear weapons programs in the U.S. and Russia. Since 2008, ³He has become extremely expensive as the supply became limited and the world has been facing the shortage [1,3]. As ³He proportional counters still represent the industry standard for neutron detection [4,5], there is still high demand for an alternative scintillation material, which would have potential to be mass-produced at low-cost from promptly available materials and technology [3]. Good neutron detection efficiency, gamma-neutron separation and robustness for deployment are the most important properties sought after [1]. From the group of inorganic scintillators, red-emitting ternary lithium manganese (II) chloride (Li₂MnCl₄) could represent a promising new material for neutron detection. In this study, undoped and Ce³⁺ and Eu²⁺ doped Li₂MnCl₄ single crystals were grown by vertical Bridgman method and basic structural, compositional, physical, thermal, optical, luminescence, and scintillation characterizations were performed.

The work is supported by Operational Programme Johannes Amos Comenius financed by European Structural and Investment Funds and the Czech Ministry of Education, Youth and Sports (Project No. SENDISO - CZ.02.01.01/00/22_008/0004596. This research was conducted in the scope of the Japanese Society for Promotion of Science standard fellowship.

- [1] Kouzes et al., Nucl. Instrum. Methods Phys. Res., Sect. A, 784 (2015) 172–175
- [2] Carturan et al., Eur. Phys. J. Plus, 129 (2014) 212
- [3] Nagarkar et al., 2013 NSS/MIC (2013) 1–4
- [4] Maslin et al., Nucl. Instrum. Methods Phys. Res., Sect. A, 1058 (2024) 168898
- [5] Dujardin et al., IEEE Trans. Nucl. Sci., 65 (2018) 1977–1997

Effects of high fluence helium ion irradiation on the micromechanical properties of Eurofer97 and ODS Eurofer steels

Matej Kubiš¹, Zoltán Száraz¹, Vladimír Kršjak^{1,2}, and Pavol Noga¹

¹*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

²*Slovak University of Technology in Bratislava, Faculty of Electrical Engineering and Information Technology, Institute of Nuclear and Physical Engineering, Ilkovičova 3, 81219 Bratislava, Slovakia*

This study aimed to address the challenge posed by elevated levels of transmutation helium in materials for advanced nuclear reactors, both fusion and fission, which leads to the formation of helium bubbles, causing embrittlement and swelling [1]. While current research primarily examines fundamental aspects such as defect evolution and void swelling at the nanoscale, our study specifically investigates the bulk properties of these materials and their practical engineering applications. To study the effects of transmutation helium, we subjected Eurofer97 and its ODS variant, as well as five other structural steels—SIMP, PM2000, OSD Eurofer, SS 310S, and 800H—designed for use in demanding radiation environments, to high fluence helium ion irradiation. Using multiple ion energies ranging from 17 MeV to 1 MeV, we conducted the irradiation experiment with the 6 MV tandem accelerator at the ion beam laboratory at ATRI MTF STU. We systematically decreased the energy levels to create a uniform "box-profile" with a helium concentration of 1000 appm [2]. This method resulted in a consistently irradiated layer approximately 65 μm thick, allowing us to focus on assessing changes in the micromechanical properties, particularly hardness, of the irradiated Eurofer97 and its ODS variant using the nanoindentation method. In this contribution, we present the initial findings of our work, focusing on the nanoindentation analysis of the irradiated steel samples.

This research was co-funded by the European Regional Development Fund under contract No. ITMS2014+: 313011W085., No. ITMS2014+: 313011BUH7 and INNUMAT Horizon Europa-EURATOM, Grant agreement ID: 101061241

[1] V. Kršjak et al. *Journal of Materials Science and Technology* 105 (2022) 172-181.

[2] P. Noga et al. *Materials* 15 (2022) 6443.

Analysis of measurement uncertainties in mechanical production and subsequent use for process stability control

Milena Kubišová, Jana Knedlová, Vladimír Pata, and Oldřich Šuba

Tomas Bata University in Zlín, Faculty of Technology, Vavrečkova 5669, Zlín, Czechia

In the current industrial environment, where quality is a key factor of competitiveness, the measurement and control of the stability of production processes plays a vital role. This work focuses on the analysis of measurement uncertainties in mechanical production and their subsequent use for process stability control. Measurement uncertainties are an inherent part of any measurement system, and their understanding and proper management is necessary to ensure the accuracy and reliability of production processes. The MSA (Measurement Systems Analysis) method enables the assessment of the capability of measurement systems and the identification of sources of variability. Emphasis is placed on the standard uncertainties of type A and B and the ways in which they affect the measurement process. The work also includes a description of the implementation of statistical process control (SPC) and its importance for maintaining a stable production process. SPC makes it possible to continuously monitor production processes and quickly identify deviations, which leads to timely correction and minimization of defects. To achieve these goals, quality tools such as the Ishikawa diagram, histogram and Pareto diagram are used. This work provides a comprehensive view of the importance of measurement and data analysis to ensure stability and quality in manufacturing processes.

The journey of nickel

Vladimír Kuchtanin

*Slovak University of Technology in Bratislava, Bratislava, Slovak Republic, Radlinského 9,
Bratislava, Slovakia*

Nickel has been found in metallic artefacts dating back more than 2,000 years. It was first identified and isolated as an element by the Swedish chemist, Axel Cronstedt, in 1751. In the 19th century, it came to prominence in plating and in alloys such as “nickel silver” (German silver) in which it is alloyed with copper and zinc. This alloy was named for its colour and does not contain any silver! 15th century miners in Germany found a brown-red ore which they believed to contain copper. They called it Kupfernickel or Devils’ Copper because they couldn’t recover copper from it. Coins in the USA first used nickel alloyed with copper in 1857. The “nickel” was not made from pure nickel but in 1881, pure nickel was used for coins in Switzerland. Stainless steels were discovered early in the 20th century and nickel was found to have a very beneficial role in many of the common grades, which continues to this day. Alloys based on nickel were found to have excellent corrosion resistance and could withstand high temperatures, which made them suitable for chemical plants and also allowed the practical realisation of the jet engine. As a result of these developments, nickel has enjoyed a very strong growth of demand over the past century. This continues today because of the essential role nickel plays in many technologies. While the concentration of nickel in the earth’s crust is 80 parts per million, the earth’s core consists mainly of a nickel-iron alloy.

This work was supported by the Scientific Grant Agency of the Slovak Republic (VEGA 1/0686/23)

Let's reveal the secrets of chemistry in the environment to children

Alexandra Kucmanová and Margita Ščasná

Slovak University of Technology in Bratislava, Faculty of Materials Sciences and Technology in Trnava, Institute of Integrated Safety, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovak Republic

This article aimed to determine the effectiveness of an innovative approach to teaching chemistry through experiential learning in a chemical laboratory followed by theoretical instruction by teachers and subsequent theoretical teaching by teachers. Experiential learning and an excursion were completed by twelve-year-old elementary school pupils together with their chemistry teacher in the chemical laboratory at the Institute of Integrated Security, where they were shown simple chemical experiments. During the theoretical classes, the processes that they had previously seen in the laboratory, were explained. During the excursion, the pupils carried out practical experiments under the guidance of university teachers, which enabled them not only to visualize theoretical knowledge but also to gain practical experience with chemical techniques. Subsequent teaching was designed to link practical experience with theory, improving overall understanding and retention of the subject matter. Preliminary observations indicate that combining the theoretical curriculum with practical examples increases students' motivation and interest even in such a subject as chemistry. This can lead to a better understanding and long-term retention of acquired knowledge. In addition, the article focuses on investigating the impact of an innovative approach on the environmental awareness of pupils, as the experiments were focused on chemical processes related to environmental protection. The preliminary results of the processing of the results from the interviews with pupils during the excursion and the structured interview with the teacher indicate a positive impact of this innovative method on the educational process of the pupils. The article provides valuable insights for educators and education experts aiming to implement experiential learning into the pedagogical process to improve the understanding of the basic principles of chemistry and promote environmental awareness among younger generations.

This work was supported by the Slovak Research and Development Agency, project No. APVV-20-0124.

Influence of final turning on SCC susceptibility and corrosion properties of austenitic stainless steel 08Ch18N10T

Marek Kudláč, Mária Dománková, Katarína Bártoová, Matúš Gavalec, and Dávid Slněk

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

Final machining, such as final turning or final milling, aims to smooth the given machined surface of the material and obtain dimensional tolerance. However, with tough materials like austenitic stainless steels, where deformation hardening also occurs, the machining of these materials is complicated, and consequently the character and properties of the machined surface of these steels can have a negative impact on corrosion resistance. The affected parameters may include surface microhardness, roughness or residual stresses. In this work, the influence of final turning on stress corrosion cracking susceptibility and corrosion resistance of austenitic stainless steel 08Ch18N10T was monitored where as a toll a replaceable double-sided sintered carbide cutting plate with a negative rake angle was used. A combination of two machining parameters was set up: feed (0.12, 0.2 and 0.3 mm) and cutting speed (100 and 250 m min⁻¹). The roughness, microhardness and the surface deformation zone depth were analysed on the machined surface. It was found that hardness but also roughness increased with increasing tool feed. Using the exposure of samples in a boiling MgCl₂ solution, susceptibility to stress corrosion cracking was observed. Density of cracks as well as the depth or length of cracks into the material were studied and evaluated using SEM and ImageJ software. With increasing feed, the density of cracks decreased, on the contrary, the length and depth of cracks increased. Electrochemical potentiokinetic reactivation analysis, a double loop method, was used to determine sensitization to intergranular corrosion. The samples were determined to be non-sensitized. This method also showed the effect of roughness on the resulting polarization scans.

This work was supported by the Slovak Research and Development Agency under the Contract no. APVV-22-0146. This work was supported by the call for doctoral students and young researchers of Slovak University of Technology in Bratislava to start a research career (Grant 23-06-09-A).

Methods for determining reliability of complex systems

Eva Labašová and Vladimír Labaš

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

The contribution deals with the determination of the final reliability function, the mean time to failure and the hazard rate of complex systems. These systems cannot be simplified to a combination of series and parallel connected blocks [1]. The systems were set by using a reliability block diagrams [2]. Each block represents an element of the system, the connections between these elements are set by lines. Ties connections might be one-way or double-way, what is shown by the arrows. The aim of the contribution is to determine the reliability function of the complex system on the model example. Three methods were used to determine the reliability function: the method of minimum paths, the method of critical sections and the decomposition method. The Matlab program was used for calculations. The article presents the basic principles of individual methods and the functional relationships used to determine reliability function of the systems [3]. Virtual block diagrams of the respective system are also shown for all three methods. In terms of calculation efficiency, the decomposition method seems to be the most suitable. It is not necessary to apply the idempotence transformation because neither of elements of the system is repeated in virtual models more than once. In the methods of minimal paths and critical sections, it is necessary to apply the idempotence transformation, because some elements of the system can be found more than once in virtual models.

This work was supported by Projekt No. 035STU-4/2024.

- [1] Janíček F and Kovács Z 2009 Reliability in electro energetics (Bratislava: Renesans, spol. Ltd)
- [2] Dhillon B S 2005 Reliability, Quality, and Safety for Engineers (CRC Press, USA)
- [3] Mayers A 2010 Complex system reliability (Springer-Verlag London Limited)

Using a Compositional Thermal Reservoir Simulator (STARS) to Examine Mechanisms and Scaling of Enhanced Oil Recovery Processes

Shelley Anne Lorimer

MacEwan University, 10700-104 Ave, Edmonton, Canada

Understanding scaling of enhanced oil/bitumen recovery processes is essential in moving laboratory scale experimental results to field scale. Scaling theory for thermal processes, was developed by Pujol and Boberg [1], but for many processes such as Steam-Assisted Gravity Drainage (SAGD), solvent enhanced oil recovery and in-situ combustion [2], scaling from lab scale to field scale is not well understood. This talk summarizes research done at MacEwan University that uses a commercial thermal compositional reservoir simulator to study the mechanistic behavior and scaling of SAGD, solvent and combustion processes in Athabasca bitumen. This work stems from Shook et al. [2] who used reservoir simulation to confirm scaling groups for waterflooding. A similar strategy to Shook et al. was used in this work whereby the scaling of the enhanced oil recovery processes was examined using reservoir simulation at three different reservoir scales: lab scale, semi-field scale and field scale. Parameters were chosen to investigate the capability of the reservoir simulator for capturing scalability with a focus examining the results considering scaling groups that define the mechanisms for each of the processes. Compositional reservoir simulation is extremely flexible as it permits the numerical modeling of many physical mechanisms for enhanced oil recovery in a porous media. A wide variety of mechanisms such as chemical kinetics, diffusion, dispersion, gravity and/or drive forces, viscous forces, and capillary effects can be readily examined and analyzed. In addition, multiple components can be used in a 3D examination of complex reservoir properties such as permeability and porosity. Temperature, oil saturation and water saturation profiles and process recovery variables were examined at the three different scales. Results confirmed scalability of the processes when the simulation results were non-dimensionalized. Other parameters included effects of capillary pressure, and other injection parameters on scalability. Scaling approaches are summarized for each process as well as a discussion about the suitability of reservoir simulation as a tool in examining the mechanisms that drive each process and whether or not reservoir simulation supports the scaling groups for the processes.

- 1 L. Pujol and T.C. Boberg, Scaling Accuracy of Laboratory Steam Flooding Models, SPE Paper 4191, SPE California Regional Meeting, 8-10 November, Bakersfield, California, (1972).
- 2 M.R. Islam and S.M. Farouq Ali, New scaling criteria for in-situ combustion experiments, Journal of Petroleum Science and Engineering, Volume 6, Issue 4, p. 367-379, (1992), ISSN 0920-4105, [https://doi.org/10.1016/0920-4105\(92\)90063-7](https://doi.org/10.1016/0920-4105(92)90063-7).
- 3 M. [2] Shook, D. Li and L.W. Lake, Scaling Immiscible Flow Through Permeable Media by Inspectional Analysis, In Situ, 16(4), p. 311-349, (1992).

Influence of specimen dimensions on tensile behavior of NiTi alloy

Michal Kopelent¹, Monika Losertová¹, Radek Sedláček², Bedřich Smetana¹, Adam Kratochvíl², Kristýna Kubášová², and Bogusława Adamczyk-Cieślak³

¹VŠB-Technical University of Ostrava, Faculty of Materials Science and Technology, 17. listopadu 2172/15, 708 00 Ostrava – Poruba, Czech Republic

²Technical University in Prague, Faculty of Mechanical Engineering, Technická 1902/4, 160 00 Prague, Czech Republic

³Warsaw University of Technology, Faculty of Materials Science and Engineering, ul. Wołoska 141, 02-507 Warsaw, Warsaw, Poland

Nitinol is a shape-memory alloy composed of nickel and titanium that can exist in three different states, each with unique properties and behaviors. The three states are martensite, superelastic austenite capable of transforming into stress-induced martensite, and stable austenite. The main variable that affects the presence of these states for given chemical composition of the alloy is the temperature. The Young's modulus of the NiTi alloy is reported to range from 28 to 83 GPa, with higher values corresponding to superelastic austenite. Nevertheless, his Young's modulus is more closely aligned with the elastic properties of human bone than any other metallic material utilized in the field of biomedicine. It is therefore of great importance to identify an appropriate phase composition in order to ensure the convenient superelastic properties and mechanical strength of plates or nails that can be used in traumatology or orthopedics. The mechanical properties of NiTi specimens are studied by the tensile testing that is usually conducted either up to specimens breaking or only to superelasticity region manifestation with subsequent unloading. This work investigates the specimen dimension effect on the tensile behavior for NiTi alloy with the composition of 56.31 wt.% Ni and 43.69 wt.% Ti. The development of the curves at tensile testing of two different dimensions of NiTi was evaluated. The phase composition of the NiTi testing material was determined by XRD and DSC analysis.

This work has been realized in the framework of the following projects: FV40306 "Development of new implants for correction of angular pediatric deformities in sterile design", NU23-08-00043 "Additive manufacturing of NiTi alloys for applications in orthopedics and traumatology" and SGS SP2024/062 - Influence of production, processing parameters and degradation mechanisms on the resulting material properties and lifetime of structural materials.

Impact of nickel addition on the phase composition and properties of Sn-Ag-Cu solder alloys

Tereza Machajdíková, Roman Čička, Ivona Černíčková, Libor Ďuriška, and Marián Drienovský

Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia

Lead-free solders have been adopted widely due to the environmental and health concerns associated with lead. However, these alloys face several challenges that impact their performance and reliability in electronic applications, e.g. high melting temperature, decrease in mechanical properties, and formation of brittle intermetallic compounds. [1] The addition of nickel has the potential to improve the properties of lead-free solder alloys. [2-4] This study focuses on the addition of Ni into the solder alloy with varying nickel content (0.1-4 mass% Ni) using computational thermodynamics and experimental techniques. For the computational part, the phase equilibria of the system was predicted to analyse the effect of nickel on the solder properties. The experimental part employed various techniques (scanning electron microscopy, energy-dispersive X-ray spectroscopy, X-ray diffraction, and differential scanning calorimetry). From the experimental results, it was found that the primary phases identified were Ag₃Sn, β -Sn, and Cu₆Sn₅. At a nickel content of 1 wt.% or higher, the Ni₃Sn₄ phase also appeared. As the nickel content increased, the alloy's melting temperature rose sharply, and changes in the solubility of other elements, as well as the stabilization of the Ni₃Sn₄ and Cu₆Sn₅ phases, were observed. The analysis revealed that Nickel content significantly influences the phase composition of the alloy.

This work was supported by the Slovak Research and Development Agency (project APVV-20-0124) and Slovak Grant Agency VEGA (project 1/0389/22)

- [1] Kotadia HR, Howes PD, Mannan SH. A review: On the development of low melting temperature Pb-free solders. *Microelectr. Rel.* 2014; <http://dx.doi.org/10.1016/j.microrel.2014.02.025>
- [2] Hammad AE. Enhancing the ductility and mechanical behavior of Sn-1.0Ag-0.5Cu lead-free solder by adding trace amount of elements Ni and Sb. *Microelectr. Rel.* 2018; <https://doi.org/10.1016/j.microrel.2018.06.015>
- [3] Wang Y, Wang G, Song K, Zhang K. Effect of Ni addition on the wettability and microstructure of Sn_{2.5}Ag_{0.7}Cu_{0.1}RE solder alloy. *Mat. Des.* 2017; <https://doi.org/10.1016/j.matdes.2017.01.046>
- [4] Zeng G, McDonald SD, Gu Q, Terada Y, Uesugi K, Yasuda H, Nogita K. The influence of Ni and Zn additions on microstructure and phase transformations in Sn-0.7Cu/Cu solder joints. *Acta Mat.* 2015; <https://doi.org/10.1016/j.actamat.2014.10.003>

Assessment of the suitability and durability of a recycled polymer product as a building component

Lenka Markovičová, Viera Zatkalíková, and Patrik Chobot

University of Žilina, Univerzitná 8215/1, Žilina, Slovakia

The aim of this work is to assess the influence of natural environmental conditions (temperature, time, humidity, microorganisms, UV radiation) on the modification of the properties of rubber composites. The study evaluates the suitability and durability of recycled polymer products by investigating changes in tensile strength, hardness and fire performance under natural ageing conditions. Recycled polymers offer environmental benefits, but their long-term properties require careful assessment for practical applications. Samples were exposed to natural weathering for a specified period and mechanical properties were measured periodically. Tensile strength was evaluated to determine structural integrity, hardness to assess surface durability and fire properties to ensure compliance with safety regulations. The results showed an initial slight increase in tensile strength and hardness. With increasing length of exposure, the composite started to degrade gradually which was reflected by a decrease in the monitored parameters. The fire resistance proved to be insufficient as the composite exhibited poor fire safety in both horizontal and vertical directions, but this can be improved by the addition of fire retardants. The study concluded that although recycled polymers show promising durability, specific formulations may require improvements to maintain mechanical properties over time.

The research was supported by Scientific Grant Agency of Ministry of Education, Science and Sport of Slovak Republic and Slovak Academy of Science, grant KEGA No. 016ŽU-4/2023.

Efficiency of selected sorbents for eliminating PCBs from soil

Jaroslava Maroszová

*Faculty of Chemical and Food technology, STU in Bratislava, Slovakia, Radlinského 9,
Bratislava, Slovakia*

Polychlorinated biphenyls (PCBs) are physically and chemically very stable substances with a serious negative impact on the health of the human organism as well as on the surrounding environment. In addition to acute symptoms in the form of dermatoses or nausea, chronic toxicity is especially serious, in the form of hepato-, nephro-, neuro-, immuno- and other toxicities, including hormonal disorders and disorders of the excretory system. Due to their optimal physico-chemical properties, they were massively produced all over the world. Chemko Strážske - a factory in eastern Slovakia, was also an important producer of these substances. Gradually, after the identification of serious toxic effects on health and the environment, the production of PCBs was suspended worldwide (in Czechoslovakia as one of the last countries in 1984). However, due to the prohibition of production and distribution, a large amount of these substances remained in the premises of the former plant and its surroundings, together with the by-products of their production, as a significant toxicological risk. After the partial elimination of solid waste from the premises of the former factory, the question of cleaning up the environment in the wider area also comes up. These are mainly water and soil from the surrounding area. The present paper will present possible technological procedures that can be helpful in removing this environmental burden from surrounding.

This work was supported by the Scientific Grant Agency of the Slovak Republic Project APVV-19-0087 and VEGA 1/0686/23

Measuring the toughness of weld joints on a tensile test machine.

Maroš Martinkovič and Pavel Kovačócy

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

In the tensile strength of weld joints, the sample breaks at the point of least strength or at the point of the defect. If there is a fracture of the basic material, we do not get an overview of the strength of the individual parts of the weld joint [1]. For that reason a shear test have been developed. This process implies that it would be possible to measure shear strength and toughness in butt welds of base materials, in different places of the heat affected zone, in weld metal. Mechanical properties of the welded joint can be characterized by determination of strength and from the force-displacement dependence by the toughness. Shearing in predetermined part of the welded requires fixation of the sample in the required position using a holder. This causes that it is not possible to determine the specific shear energy for samples with different shear areas. Fracture energy consists of two components - shear energy and rupture (final failure) energy. Shear energy is related to the deformation properties of the joint - the energy of deformation until the joint deforms and a crack does not appear, that is, it is related to the resistance to crack formation, the fracture energy to the resistance to crack propagation [2]. The fracture in the shape of the S curve subsequently causes a decrease in the gradient of the decrease in force by mutual friction with the created surface, which increases the value of the measured fracture energy. Therefore, it is possible to exactly determine the energy only up to the maximum value of the force. In the shear test a special device with universal testing machine was used. For accurate force measurement, the strain gauge force sensor of the universal testing machine was calibrated using an externally calibrated strain gauge pressure sensor.

This work was supported by the Project VEGA No. 1/0391/24.

- [1] M. Kartal, R.M. Molak, M. Turski, S. Gungor, M. E. Fitzpatrick and L. Edwards, Applied Mechanics and Materials 7–8 (2007).
- [2] C. Leitão, M.I. Costa, K. Khanijomdi, D.M. Rodrigues, Materials & Design 51 (2013).

Analysis of the influence of geometric and material parameters of fixing edge layers on the modal properties of plate structures.

Milan Nad', Ladislav Rolník, and Peter Bucha

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

The appropriate vibroacoustic properties, such as natural frequencies and mode shapes, are very important conditions for the required behaviour of mechanical structures. It is clear that these properties are dependent on the so-called spatial properties, which consist of mass, stiffness and damping properties of the given mechanical structure. In many cases, when the dynamic properties of these structures are unsatisfactory, it is necessary to vary the structural behaviour to solve noise and vibration problems. The technique by which it is possible to achieve the required dynamic properties consists mainly in changing the mass, stiffness and damping properties of the structure, is called structural dynamic modification. The plate structures can be considered as important building components of many technical equipment. These plate structures are very often exposed to periodically repeating dynamic loads and in the case of inappropriately designed parameters of plate structures, these loads lead to the resonant states. This state is inappropriate and the structural modifications of plate structures are necessary. One of the very effective methods of plate structural modification is the method edge fixing of plate and also change of fixation parameters at the edges of the plate structure. The modification of dynamical properties of plate structures using fixing edge layers is presented in this paper. Structural modification of the selected geometrical shapes of plate structures is based on the shapes and geometrical parameters of the layers. By changing the width, thickness and slope of the fixing edge layers is possible to achieve modification of modal properties (especially natural frequencies and mode shapes) of the given plate structures. The results obtained by computer simulations using the ANSYS program confirm that this method of structural modification provides a suitable tool for the so-called "dynamic tuning" of plate structures.

This work was supported by project KEGA 035STU-4/2024.

- [1] V. Dekýš, M. Sága, M. Žmindák, Dynamics and reliability of mechanical systems, VTS ZU, (2004) Žilina.
- [2] L. Meirovitch, Analytical Methods in Vibrations. McMillan Company (1967) London.
- [3] M. Nad', Modification of modal characteristics of vibrating structural elements, Scientific Monographs (2010) Köthen.
- [4] D. Thorby, Structural Dynamics and Vibration in Practice: An Engineering Handbook, Elsevier Ltd. (2008) Oxford, ISBN 978-0-7506-8002-8.

Theoretical modelling of the frequency-dependent phase shift between emission and excitation in ZnO nanorod photoluminescence spectra

Radim Novák¹, Zdeněk Remeš¹, Štěpán Remeš¹, and Júlia Mičová²

¹*Institute of Physics of the Czech Academy of Sciences, Na Slovance 1999/2, 182 00 Praha 8, Czechia*

²*Institute of Chemistry SAS, Dubravska cesta 9, 84538 Bratislava, Slovakia*

Hydrothermally growth, zinc oxide (ZnO) nanocrystals are known for their interesting scintillation and photocatalytic properties. In our previous paper we presented an optical setup for measuring spectrally resolved photoluminescence (PL) mean decay time using conventional UV LED with sinusoidal excitation and a phase shift method with about 10 ns time resolution [1], recently upgraded to 1 ns. Photoluminescence decay is the process by which the excited state of a material, induced by the absorption of photons, returns to the ground state, emitting light in the process. This process can be measured in time domain, with the decay rate indicating how quickly the material returns to its ground state after excitation, or equivalently in frequency domain, with the difference between the phase of the light wave at the moment of excitation and the phase of the light wave at the moment of emission. Here we report on the theoretical modelling of the frequency-dependent phase shift between emission and excitation in photoluminescence spectra of ZnO nanorods.

This work was supported by the CAS Open Science 2024, CAS-SAS Mobility Plus project SAV-23-13, CAS-SAS-2022-08, MSTC Danube project 8X23025 and by the CSF project 24-10607J. This work was also supported by the Slovak Research and Development Agency under the Contract no. DS-FR-22-0035.

- [1] Z Remeš, M Buryi, J Pejchal, O Babčenko, Š Remeš, R Novák and J Mičová, J. Phys.: Conf. Ser. 2712 (2024) 012004

Surface modification of additively manufactured parts by drag finishing

Boris Pätoprstý, Ladislav Morovič, Ivan Buranský, Maroš Dubnička, and Marek Vozár

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

The production of parts by additive manufacturing is a quickly progressing area. The issue with additively manufactured parts is surface treatment with conventional methods. One of the possibilities is the treatment of the surface by drag finishing, when it is possible to modify even the complicated shapes of the parts. The article deals with the modification of additively produced parts by drag finishing. The goal was to find out to what extent is it possible to modify the integrity of the surface of parts produced by additive manufacturing. Simple cylindrical parts were produced by Fused Deposition Modelling technology. The parts were made of ABS plastic with different layer thickness. Surface roughness changes over time were monitored. As a drag finishing machine, a device developed at Faculty of Material Science and Technology was used. Two drag finishing media were used for part processing - Al_2O_3 and SiC + walnut shells. It was determined that the roughness of the surface of additively manufactured parts can be significantly improved.

This work was supported by the Slovak Research and Development Agency under the contract No. APVV-21-0071. This work was supported by the Science Grant Agency - project VEGA 1/0266/23.

Site-controlled growth of InGaAs quantum dots with buried stressor for the development of microlasers and quantum light sources

Martin Podhorský¹, Maximilian Klonz¹, Imad Limame¹, Sarthak Tripathi¹, Kartik Gaur¹, Chirag Chandrakant Palekar¹, Priyabrata Mudi¹, Petr Klenovský^{2,3}, Sven Rodt¹, and Stephan Reitzenstein¹

¹*Institute of Solid State Physics, Technische Universität Berlin, Hardenbergstraße 36, D-10623 Berlin, Germany*

²*Department of Condensed Matter Physics, Faculty of Science, Masaryk University, Kotlářská 267/2, 61137 Brno, Czech Republic*

³*Czech Metrology Institute, Okružní 31, 63800 Brno, Czech Republic*

Quantum dots (QD) have proven to have many applications in optoelectronics [1.], photonics [2.], quantum photonics [3.,4.] and telecommunications [5.]. This work focuses on the systematic optimisation of the growth and fabrication parameters of site-controlled InGaAs quantum dots (SCQDs), grown with buried stressor method [6.], to enhance the precision, uniformity and reproducibility of the quantum dot placement and local density for their advanced optoelectronic applications, such as low-threshold microlasers and quantum light sources. The impact of the growth and the fabrication on the structural and optical properties of SCQDs is thoroughly investigated via atomic force microscopy (AFM), scanning electron microscopy (SEM), confocal laser scanning microscopy (CLSM), X-Ray diffraction (XRD) and photoluminescence (PL) spectroscopy.

This work was funded by the German Federal Ministry of Education and Research (BMBF) through the project MultiCoreSPS (Grant No. 16KIS1819K) and by the project Quantum materials for applications in sustainable technologies, CZ.02.01.01/00/22 008/0004572

- [1] C. Shang et al., Light Sci. Appl. 11, 299 (2022)
- [2] A. Skalli et al., Opt. Mater. Express 12, 2395 (2022)
- [3] T. Heindl et al., Adv. Opt. Photon. 15, 613 (2023)
- [4] I. Limame et al., Optica Quantum 2, 117 (2024)
- [5] Z. Yao et al., Nanomaterials 12, 1058 (2022)
- [6] A. Strittmatter et al., Phys. Status Solidi A 209, 12 (2012)

Effect of sample illumination on the content of luminescence active defects in $\text{Sn}_2\text{P}_2\text{S}_6$ crystals

Zdeněk Potůček and Zdeněk Bryknar

Czech Technical University in Prague, Faculty of Nuclear Sciences and Physical Engineering, Trojanova 13, 120 00 Prague, Czechia

Tin hypophosphite $\text{Sn}_2\text{P}_2\text{S}_6$ is promising uniaxial semiconductor ferroelectrics with favorable photorefractive properties in the red and near-infrared spectral regions, a pronounced photoconductivity, and large values of pyroelectric, piezoelectric, and electrooptic coefficients. Moreover, $\text{Sn}_2\text{P}_2\text{S}_6$ crystals exhibit photoluminescence (PL) in the red and near-infrared spectral regions at low temperatures that is related to intrinsic crystal defects [1]. In comparison to conventional orange tinted crystals the photorefractive properties of brown tinted $\text{Sn}_2\text{P}_2\text{S}_6$ crystals were improved by modification of crystal growth conditions and they are not noticeably sensitive to crystal pre-illumination as well. However, the nature of defects involved in photorefractive processes was not satisfactorily explained up to now. Since PL intensity is sensitive to the photoinduced changes in the content of luminescence active defects and energy levels of the same defects may influence photorefractive properties and photoconductivity of $\text{Sn}_2\text{P}_2\text{S}_6$ crystals, the dependence of PL intensity on exposure time was studied on four $\text{Sn}_2\text{P}_2\text{S}_6$ crystals as a function of temperature (12 - 360 K) and illumination wavelength (300 - 800 nm). All the $\text{Sn}_2\text{P}_2\text{S}_6$ crystals studied showed PL in the red and near-infrared spectral regions. Both PL spectral distribution and integral intensity were markedly sample-dependent under the same conditions. The variations with time of PL intensity were observed for all the crystals at temperatures lower than 170 K as a result of sample illumination with light with wavelength shorter than 710 nm at the same temperatures. The integral PL intensity of all the crystals cooled in the dark decreased at 12 K with time of steady-state excitation with monochromatic light with wavelength shorter than 510 nm. With respect to position of the absorption edge of the $\text{Sn}_2\text{P}_2\text{S}_6$ crystals near 496 nm at 10 K this finding indicates that PL excitation via the fundamental crystal lattice absorption decreases integral PL intensity of the crystals cooled in the dark. Likewise, the integral PL intensity of the orange tinted crystals cooled in the dark decreased at 12 K with time of steady-state excitation with monochromatic light with wavelength longer than 510 nm. On the contrary an increase of integral PL intensity was observed in the brown tinted crystal demonstrating opposite effect of illumination in the spectral region where PL of $\text{Sn}_2\text{P}_2\text{S}_6$ crystals is excited through absorption of crystal defects on the integral PL intensity of brown and orange tinted crystals. Heating of the crystal to suitable higher temperature partially or fully restored the initial PL intensity observed in the crystal cooled in the dark pointing to partial or full restoration of the initial content of corresponding luminescence active defects. The possible photoinduced changes of the charge state of supposable luminescence active defects in $\text{Sn}_2\text{P}_2\text{S}_6$ crystals resulting in the variations with time of PL intensity observed in the crystals illuminated in a suitable way at temperatures lower than 170 K are discussed.

Polymorphism of methylsalicylatocopper(II) complexes

Miroslava Puchoňová, Ján Moncol', Ján Pavlik, Vladimír Kuchtanin, and Vladimír Jorík

Department of Inorganic Chemistry, Faculty of Chemical and Food Technology, STU in Bratislava, Radlinského 9, Bratislava, Slovakia

Copper complexes containing N-donor ligands are traditionally studied from different points of view, the phenomenon of polymorphism and isomersm of transition metal complexes being one of them. In recent decades, various polymorphs and isomers of carboxylatocopper(II) complexes have been investigated [1,2]. Building upon previous research, we have focused on Cu(II) complexes with various position isomers of methylsalicylate anions (MeSal) in presence of 2-hydroxymethylbenzimidazole (2HMBzim). The synthesis in the presence of 3-methylsalicylate anion led to formation of two complexes with the same composition $[\text{Cu}(\text{3-MeSal})_2(\text{2-HMBzim})_2]$ (**1a** and **1b**). The structures of the newly prepared complexes were determined by single-crystal X-ray analysis. The complexes were characterized by spectroscopic methods (IR, UV-vis and EPR spectroscopy). Based on the crystal structures and in accordance with experimental and computational studies it was concluded, that the systems **1a** and **1b** were conformational isomers/polymorphs. With the help of the state-of-the-art computer simulation, it was predicted, that the presence of methanol or acetonitrile as solvents played a pivotal role in folding the molecular components into a specific polymorphic form.

This work was supported by the Scientific Grant Agency of the Slovak Republic APVV-19-0087 and VEGA 1/0686/23.

[1] S. Matejová et al., Polyhedron, 2019, 170, 86.

[2] Z. Repická et al., Struct. Chem., 2010, 21, 1093.

Nanosecond photoluminescence decay in Mo-doped ZnO nanorods observed by TCSPC and phase shift methods

Zdeněk Remeš¹, Neda Neyková^{1,2}, Štěpán Remeš¹, Radim Novák¹, Romana Kučerková¹, Vítězslav Jarý¹, and Julia Mičová³

¹FZU - Institute of Physics of the Czech Academy of Sciences, Na Slovance 1999/2, Prague 8, Czechia

²Centre for Advanced Photovoltaics, Faculty of Electrical Engineering, Czech Technical University in Prague, Technická 2, 16627 Prague, Czechia

³Institute of Chemistry SAS, Dubravska cesta 9, 84538 Bratislava, Slovakia

Hydrothermally grown, pellet-pressed Mo-doped zinc oxide (ZnO) nanocrystals were investigated for time-resolved photoluminescence at room temperature under UV excitation. Two optical setups were compared. The TCSPC setup was based on ns-short-pulse excitation followed by time resolved histogram-like counting of emitted photons. The phase-shift method was based on the frequency-resolved phase delay between sinusoidal excitation and emission [1]. Whereas the TCSPC method is nowadays a commercially available and widely used, the second method was built as a low-cost student's setup with a conventional UV LED as the excitation source, sine-wave voltage generator, an old dispersive monochromator, optical band-pass and long-pass filters, a red-enhanced photomultiplier and a lock-in amplifier [2]. Recently, the setup was upgraded by a new HF2LI Zurich Instruments 50 MHz lock-in amplifier, which also includes pulse generator and a current amplifier to measure the PMT photocurrent. Both methods gave a similar time resolution slightly below 1 ns. While the time resolution of the TCSPC was limited by the excitation pulse width, the time resolution of the phase shift method was limited by the maximum operating frequency of the UV LED (several MHz). To be able to measure the PL decay in ps range, we need to replace UV LED by a new, faster UV excitation source to increase the excitation frequency up to the 50 MHz limit of our lock-in amplifier.

The work was supported by the CAS-SAS Mobility Plus project SAV-23-13 (CAS-SAS-2022-08), MSTC Danube project 8X23025 and by the CSF project 24-10607J, by the Czech Ministry of Education, Youth and Sports grant no. CZ.02.01.01/00/22_008/0004617 – "Energy conversion and storage" and by the Slovak Research and Development Agency under the Contract no. DS-FR-22-0035.

- [1] J. R. Lakowicz, G. Laczko and H. Cherek, Analysis of fluorescence decay kinetics from variable-frequency phase shift and modulation data, *Biophys. J.* 46 (1984) 463-477
- [2] Z Remeš, M Buryi, J Pejchal, O Babčenko, Š Remeš, R Novák and J Mičová, The spectrally resolved photoluminescence decay in YAG:Er, ZnO and SiO₂ crystals, *J. Phys.: Conf. Ser.* 2712 (2024) 012004.

CEDEG - a partner for your business, research and innovations

Ivo Říha

*CEDEG - CE Digital and Enviro Grouping, Studentska 6202/17, 708 00 Ostrava-Poruba,
708 00 Ostrava-Poruba, Czechia*

CE Digital and Enviro Grouping (CEDEG) is a research, business and networking grouping that operates predominantly within the Central European area. Through its activities, the organization fulfils the nature of a non-profit organization, a transnational cluster grouping (metacluster). The metacluster is dedicated to research, development, dissemination and monetization of activities in two important topics of contemporary global society - the field of digitalization and environmentally advanced technologies. CEDEG activities cover mainly the following areas:

- **Innovation and support of own members**

To achieve growth, excellence and high-quality innovation synergies of member companies, research organizations and other members, CEDEG mainly implements the involvement of high-quality industrial and research partners in innovative research and development projects or other development activities and their support in obtaining the best European financial support programs. initiatives in order to provide new opportunities in the Central European and European environment.

- **International cooperation**

CEDEG internationally provide partnership with significant leading foreign clusters, innovation centers, digital innovation centers, industrial enterprises, universities, regions and other entities connecting prospective small and medium-sized enterprises and startups with quality research and business partners from Central Europe and other regions.

- **Dynamization and growth of member small and medium-sized companies**

CEDEG helps small and medium-sized enterprises develop in their markets is the strong mission of CEDEG Grouping through value-added support. Through expertise and funding, CEDEG Grouping supports SMEs in growth to become future mid-cap companies in Central Europe.

- **Promoting the principle of the digital and environmental ecosystem**

CEDEG also aims to involve its members in key sector initiatives related to cooperation and development of national, regional and local innovation ecosystems in these areas within the Central European regions and at the European level. In addition, the organization contributes to the discussion and setting of sectoral strategic concepts and the compilation of analytical documents within the scope of the defined areas of interest.

Biochars from Cardboard as an Alternative Adsorbent for the Removal of Pesticides from the Water Environment

Margita Ščasná, Alexandra Kucmanová, and Maroš Sirotiak

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Institute of Integrated Safety, Ulica Jána Bottu č. 2781/25, 917 24 Trnava,
Slovakia*

Hydrothermal carbonization (HTC) is a promising method for converting biomass into carbonaceous materials with high adsorption capacity. In this study, we investigated the effect of different HTC conditions on the production of hydrochars from egg cardboard waste and their subsequent efficiency in removing metribuzin from the water environment. Biochars are presented as a sustainable alternative to commonly used sorbents, which often have limitations such as high cost and environmental impact. All hydrochar samples were produced using the same amount of dry biomass and distilled water, varying only the time (2, 3, 4, and 5 h) and temperature (200 °C, 220 °C, 240 °C) of the HTC process. The organic carbon content of each sorbent was measured using the Ľurin method modified by Nikitin. Metribuzin removal efficiency was evaluated using comparison measurements after 3 and 6 hours of adsorption. The morphological properties of the hydrochars were analysed by scanning electron microscopy (SEM). The results showed that temperature and HTC time significantly affect the structure, organic carbon content, and adsorption capacity of the hydrochars. The highest metribuzin removal efficiency was observed for samples produced at 240 °C after 6 h, which correlated with a better-developed porous structure and higher organic carbon content confirmed by SEM analysis. Conversely, lower temperatures and shorter HTC times produced hydrochar with a less developed porous structure, lower organic carbon content, and lower adsorption capacity. The study's findings suggest that optimising HTC conditions are crucial for maximizing the efficiency of hydrochars in removing organic contaminants from water environment. These results contribute to a better understanding of the relationship between hydrochar production conditions, organic carbon content, and adsorption properties, which is important for its future applications in water treatment and environmental engineering.

This work was supported by the Slovak Research and Development Agency, project No. APVV-20-0124. This work was supported by the call for doctoral students and young researchers of Slovak University of Technology in Bratislava to start a research career (Grant 23-06-15-A).

The impact of generator parameters on cutting width in machining nickel alloys using WEDM technology

Vladimír Šimna

Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology in Trnava, Institute of Production Technologies, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia

The objective of this study is to analyze the influence of generator parameters on the kerf width in Wire Electrical Discharge Machining (WEDM) technology for the nickel alloy Inconel 718. An experiment was designed using selected parameters that could affect the kerf width based on the acquired knowledge. The introduction covers the general principles of EDM and WEDM technology, discusses the method of spark generation using a generator, and focuses on how electrical discharge machining impacts Inconel 718. The experimental part was conducted on a WEDM machine from Charmilles Technologies. During the experiment, two responses were recorded: the groove width, measured using Dino-Lite and Alicona optical devices, and the cutting speed. The final part of the thesis presents a statistical evaluation of the influence of individual parameters on the cut.

This work was supported by the Slovak Research and Development Agency under the contract No. APVV210071. This work was supported by the Science Grant Agency project VEGA 1/0266/23.

Thermoelectric properties of doped Bi₂O₂Se

Antonín Sojka¹, Jan Zich^{1,2}, Čestmír Drašar¹, Tomáš Plecháček¹, Jiří Navrátil¹, Pavlína Ruleová¹, and Karel Knížek²

¹University of Pardubice, Faculty of Chemical Technology, Studentská 95, Pardubice 532 10, Czechia

²FZU - Institute of Physics of the Czech Academy of Sciences, Cukrovarnická 10/112, 162 00 Prague 6

Over the past decade, Bi₂O₂Se has emerged as an interesting 2D material. It has excellent carrier mobility and mechanical properties in its single crystal form. Thanks to its remarkable transport properties, Bi₂O₂Se has also been explored in polycrystalline form for thermoelectric applications. Bi₂O₂Se is an n-type thermoelectric material characterized by a quasi-2D layered structure. Numerous studies have shown that this material can achieve low thermal conductivity, and its carrier concentration and mobility can be adjusted through doping. In this study, we have examined the substitution of Bi with transition metals, focusing on manganese as a case study. Our analysis of transition metal-doped Bi₂O₂Se polycrystalline samples included X-ray diffraction, scanning electron microscopy, and measurements of electrical conductivity, Seebeck coefficient and thermal conductivity. We compared the solubility limits, transport properties, and other parameters of our samples with existing literature data, offering explanations for the significant discrepancies observed.

The authors thank for financial support from the Czech Science Foundation (Project No. 22-05919S) and the grant of the Ministry of Education, Youth and Sports of Czech Republic (grant LM2023037).

Surface roughness evaluation of the formed parts produced by the multi-pass cold metal spinning applying laser textured tool

Jana Šugárová¹, Peter Šugár¹, and Martin Frnčík^{1,2}

¹Slovak University of Technology in Bratislava, Jána Bottu 25, 917 24 Trnava, Slovakia

²ZKW Slovakia, spol. s r. o., Bedziarska cesta 375, Krušovce, Slovakia

Metal spinning is an incremental forming process based on the forming a flat metal disc on a lathe into many different shapes. It is used in wide spectrum of production areas including those requiring parts with high precision and improved surface integrity. There are a lot of metal spinning parameters which defines and affects the quality of the produced components. Some of them are parameters related to the tool-workpiece interface. These parameters have essential influence on the final surface integrity of processed parts [1-5]. According to this, the paper brings the results of an experimental study of the multi-pass cold metal spinning process employing a laser-textured tool of 90MnCrV8 (1.2842) steel. The tool with a nose radius surface modified by pulse laser machined hexagonally arranged texture made up of dimple-like depressions with a diameter of 100 μm , depth of 20 μm and density of 6 % was applied for testing of surface hardening of DC01 low carbon steel sheet of the thickness 1 mm by applying various spinning tool pass profiles (convex, linear, and concave), mandrel speeds of 400, 800, and 1200 min^{-1} and tool feeds of 0.4, 0.8, and 1.2 mm. On the cylindrical-shaped spun samples the surface roughness of the spun cup wall was evaluated. The measurements in 0°, 45° and 90° directions related to the blank material rolling direction were realised and these responses were compared with those, which have been observed on the parts produced by the conventional, non-textured, tool. The analysis showed that applying a laser-textured roller reduces the arithmetic mean height of the spun part roughness profile R_a by about 30 % compared to this, achieved using the non-textured roller. The R_a reduction of about 15.2 % compared to the initial roughness of the blank material was documented while the influence of the planar anisotropy of the material on the surface roughness was not proven.

This research was supported by the KEGA project 026STU-4/2023.

- [1] P. G. Grützmacher, F. J. Profito and A. Rosenkranz, Lubricants 7 (11) (2019) 95.
- [2] J. Šugárová, et al., Adv. Sci. Technol. Res. J. 12 (1) (2018) 181-193.
- [3] M. Frnčík, The influence of technological and geometrical parameters of the conventional metal spinning process on macro and micro-geometrical characteristics of the spun parts. (2019) (Dissertation thesis, Trnava: MTF STU).
- [4] J. Šugárová et al. CNC Metal Spinning – Study of Properties of Spun Parts, Praha: Aleš Čeněk (2016).
- [5] M. A. Prasad, et al. Surface Review and Letters 31 (8) (2024) 1-12.

CFD analysis of damping characteristics of a hydraulic damper through geometrical modification and velocity variation

Thaer Syam², Mohamed Arab¹, Ahmad Gamil¹, Yousif Badri³, and Saud Ghani¹

¹*Department of Mechanical and Industrial Engineering, Qatar University, Doha, Qatar*

²*Department of Mechanical Engineering, Texas A&M University, 3123 TAMU, College Station, TX 77843, USA*

³*Department of Mechanical Engineering, University of Auckland, Newzland*

Shock absorbers or hydraulic dampers are a power dissipating device. Fluid flow passages are responsible for variation in the damping or hydraulic characteristics in terms of damping force with respect to velocity. The piston inside the damper has a various orifice or piston valves that cause different flow losses. They play a crucial role in the performance and stability of systems, especially those involving fluid dynamics and mechanical vibrations. In this work, a Computational Fluid Dynamics (CFD) method is used to study the flow behaviour inside a rear side two-wheeler automobile mono tube damper for different number of orifices in the piston which are two, six and ten orifices opening with changing the throttling velocities based on previous experimental work in the literature. ANSYS 17R software is used to carry out CFD analysis, the continuity, and the Reynolds averaged Navier-Stokes (RANS) equations are used to describe the throttling behaviour inside the rebound and compression chambers. A new proposed model comprises a modification of the throttle valve by changing one of the original models with 6 orifices with geometrical design freedom, aiming to achieve better damping characteristics and design freedom. The damping action has been studied and verified by throttling viscous oil through orifices for different cases. The damping action is not affected by changing the location of the orifice for the same number. It is concluded that the damping force increases with increasing the velocity of the piston. However, the damping coefficient decreases. The damping force decreases as the number of orifices increases in the piston valve. Creating designs that are safe both for the operator, the machine itself and the surrounding environment is par for the course with shock absorbing and vibration technologies.

- [1] Shams M, Ebrahimi R, Raoufi A and Jafari B J 2007 International journal of automotive technology 8(5) 615-622.
- [2] Greco R, Avakian J and Marano G C 2014 Archive of Applied Mechanics 84(8) 1117-1134.
- [3] Narkhede D I and Sinha R 2014 Journal of Sound and Vibration 333(1) 80-98.
- [4] Cavaleri L, Di Trapani F and Ferrotto M F 2017 Ing. Sismica 34 64-74.
- [5] Syam T, Muthalif A. Journal of Low Frequency Noise, Vibration and Active Control. 2022; 41(2) 676-700.
- [6] Badri Y, Hussein M, Sassi S and Renno J 2020 International Conference on Civil Infrastructure and Construction 666-671.
- [7] Chen Y, Guo K, Yang Y and Zhuang Y 2012 SAE International Journal of Passenger Cars-Mechanical Systems 5 393-403

Effect of heat treatment on the internal damping of magnesium alloys

Milan Uhríček, Peter Palček, Silvia Hudecová, Veronika Chvalníková, Martin Slezák, and
Martin Mikolajčík

University of Žilina, Univerzitná 8215/1, Žilina 01026, Slovakia

The gradual accumulation of mechanical energy within a material leads to alterations in its mechanical and physical properties. These changes can degrade material performance, resulting in decreased accuracy of machine tools, the initiation of fatigue cracks, increased noise and vibration in the working environment, modifications to material properties, reduced corrosion resistance, and the deterioration of regulatory devices and sensors. Ultimately, this can cause damage to the entire device. Measuring internal damping provides a means to monitor these structural changes and the various mechanisms involved [1, 2]. Today, there is a significant demand for the efficient use of magnesium-based materials. Magnesium alloys are particularly attractive for various industrial applications due to their specific weight, corrosion resistance, density, and strength. The damping capacity of these alloys is closely related to microstructural defects, including solute atoms, secondary phases, and voids. The interaction between moving dislocations and point defects is a primary mechanism of internal friction in magnesium alloys, meaning precipitates affect the damping capacity and contribute to damping properties. Pure magnesium exhibits very high damping capacity at room temperature due to the easy movement of dislocations. However, an increased concentration of solute atoms such as Al, Ca, and Zn, as well as impurities and precipitates, can restrict dislocation mobility, potentially reducing the friction capacity of magnesium alloys [2, 3]. Internal damping is a highly sensitive method effectively used to investigate structural defects and their mobility. It facilitates the examination of transport processes in materials and phase transformations in the solid state, which are otherwise difficult to detect. The experimental setup includes measurement and control components, along with heating and ultrasonic elements. An ultrasound generator produces a sine wave, which is then amplified and converted into a mechanical wave using a piezoceramic transducer.

The research was supported by the Scientific Grant Agency of the Ministry of Education of Slovak Republic and Slovak Academy of Sciences, VEGA 01/0461/24, KEGA 004ŽU-4/2023, KEGA 016ŽU-4/2023, project APVV-20-0427 and project to support young researchers at UNIZA, the ID of project 12715.

- [1] T. Oršulová, P. Palček, A. Soviarová. Adv. Man. and Rep. Tech. in Veh. Ind., Zielona Góra: Wydźiał Mechaniczny (2018) 263.
- [2] Z. Trojanova, P. Palček, P. Lukáč, M. Chalupová, Magnesium alloys. IntechOpen, (2017).
- [3] K. Suzuki, Y. Chino, X. Huang, M. Mabuchi, Materials Transactions, 52, (2011) 2040.

Statistical evaluation of the influence of plasma polishing parameters on the material removal rate and the cutting edge radius sizes

Tomáš Vopát and Štefan Podhorský

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

The paper introduces an innovative method for preparing the edges of cemented carbide cutting tools using plasma discharges in an electrolyte. This environmentally friendly technique rounded the cutting edges by immersing the cutting inserts into the electrolyte. The aim of the article is to statistically evaluate the influence of the process parameters on the material removal rate and the cutting edge radius sizes. The measured data were analysed in the software Minitab. Measured responses were normally distributed, thus the assumption for performing ANOVA (Analysis of Variance) analysis was fulfilled. The associated p-value of less than 0.05 for the model (95% confidence level) indicates that the input process parameters in model are statistically significant. From the results of the ANOVA analysis for material removal rate and cutting edge radius sizes, it is obvious, that all observed input process parameters had a significant influence on measured responses. Moreover, the influence of values of individual process parameters (electrolyte concentration, voltage, electrolyte temperature and polishing time) on the cutting edge radius sizes and material removal rate was evaluated.

This work was supported by the Slovak Research and Development Agency under the contract No. APVV-21-0071. This work was supported by the Science Grant Agency - project VEGA 1/0266/23.

Comparison of optical measurement methods utilization for complex high feed tool geometry

Marek Vozár, Jakub Hrbál, Róbert Straka, and Ján Milde

*Slovak University of Technology in Bratislava, Faculty of Materials Science and Technology
in Trnava, Ulica Jána Bottu č. 2781/25, 917 24 Trnava, Slovakia*

High Feed Machining (HFM) is an advanced machining technique that offers the potential for up to three times faster machining speeds compared to conventional methods. The geometric characteristics of HFM cutting tools differ significantly from those used in traditional machining, posing challenges when it comes to their precise measurement. Cemented carbide solid high feed mills feature specialized end profiles that enable the utilization of chip thinning mechanisms to achieve substantially increased feed rates. Grinding is a widely adopted manufacturing process for production of carbide tools. The tool's geometry is attained through the coordinated movement of the grinding wheel and the workpiece while employing a cooling medium. The precision of the resulting cutting tool geometry directly impacts the machining process. In the context of the experiment, five HFM tools were manufactured. The primary focus was to assess the geometry of these tools using two distinct measurement methods: a dedicated optical measuring machine designed for cutting tools and a 3D optical scanner. The results from each measurement method were subsequently compared and evaluated using the GOM Inspect software. Based on the analysis of measured data, it's possible to confidently determine that optical scanning represents a reliable and effective method for quality control of the macrogeometry of cutting tools.

This work was supported by the Slovak Research and Development Agency of the Slovak Republic under Contract no. APVV-21-0071 and VEGA grant agency of the Ministry of Education, Science, Research and Sport of the Slovak Republic and the Slovak Academy of Sciences, no. 1/0266/23.

Evaluating surface quality of heterogeneous surfaces produced by non-conventional machining technologies: methodological advances and challenges

Hana Vrbová^{1,2}, Ondřej Bílek¹, Vladimír Pata¹, Miroslav Marcaník¹, Jana Knedlová¹, and Cyril Hořava¹

¹*Tomas Bata University in Zlin, Vavreckova 5669, Zlín, 76001, Czechia*

²*Institute of Polymer Materials, Faculty of Chemical and Food Technology, Slovak University of Technology in Bratislava, Radlinskeho 9, 811 07 Bratislava, Slovakia*

This paper is focused on the evaluation of heterogeneous surface quality. In the realm of scientific practice, there exists a significant inconsistency in the methodologies employed to investigate heterogeneous surfaces produced by non-conventional machining technologies. Traditional approaches are inadequate for these types of surfaces due to the presumption of surface roughness homogeneity, which does not account for the complexities and variations inherent in heterogeneous surfaces. The utilization of unsuitable assessment methods can significantly hinder the research and development efforts related to these advanced technologies, potentially stalling innovation and the optimization of machining processes. However, through an initial investigation of roughness data obtained from heterogeneous surfaces, discernible patterns have emerged. These patterns suggest a promising opportunity for the development of a coherent and standardized approach to surface quality assessment. Such an approach would enhance the accuracy and reliability of evaluations, thereby supporting the continued advancement and refinement of non-conventional machining technologies. The findings underscore the necessity for a shift towards more sophisticated and tailored assessment methods that can accommodate the unique characteristics of heterogeneous surfaces.

This work and the project were realized with financial support from the internal grant of TBU in Zlin No. IGA/FT/2024/002, funded by the resources of specific university research.

New insight into the gas-sensing properties of β -Ga₂O₃ nanowires by near-ambient pressure XPS

Roman Yatskiv¹, Michael Vorochta², Nikola Bašinová¹, Thu Ngan Dinhová², Jaroslav Maixner³, and Jan Grym¹

¹*Institute of Photonics and Electronics, Czech Academy of Sciences, Chaberská 1014/57, Praha, Czechia*

²*Faculty of Mathematics and Physics, Charles University, V Holešovičkách 2, 180 00, Prague 8, Czech Republic*

³*Central Laboratories, Institute of Chemical Technology Prague, Technická 5, 166 28, Prague 6, Czech Republic*

Gas sensors play an essential role in environmental monitoring, medical diagnosis, chemical processing control, energy efficiency, and emission control in combustion processes. Traditionally, various metal oxides have been used as active sensing materials. The key advantages of metal-oxide sensors are their high sensitivity, rapid recovery and response times, low cost, compact size, easy production, and simple measuring electronics. Among the various metal oxides, Ga₂O₃, which is an ultrawide-bandgap n-type semiconductor [1-3], is an excellent material for the detection of both oxidizing (O₂, NO_x, CO₂) and reducing (H₂, CO, NH₃, ethanol, acetone, and CH₄) gases over a wide temperature range [4]. It has been demonstrated that at high temperatures (T>800°C), the formation of oxygen vacancies and complex lattice defects are responsible for their sensitivity. In contrast, at lower temperatures, the sensing mechanism remains unclear, and it is assumed that surface reduction-oxidation reactions play an essential role in sensing. The objective of this study [5] was to evaluate the potential of β -Ga₂O₃ nanorods as gas sensors and to elucidate their sensing mechanism at low temperatures. Using near-ambient pressure X-ray photoelectron spectroscopy, we demonstrated that adsorbed oxygen species play a crucial role in the gas-sensing properties of β -Ga₂O₃ nanorods. Our results confirmed that the interaction of oxidizing/reducing analytes with adsorbed oxygen species changes the resistivity of the β -Ga₂O₃ nanorods and that redox reactions govern the sensing mechanism at low temperatures. Furthermore, we provided new insights into the ethanol-sensing mechanisms at different temperatures. Our findings revealed that at 400°C ethanol reacts with chemisorbed oxygen on the surface of β -Ga₂O₃ via the acetaldehyde pathway, whereas at 100°C, the gas-sensing mechanism includes the adsorption of ethanol molecules, which are partially oxidized to ethoxy due to the dissociative chemisorption of ethanol.

- [1] G. Zbigniew, Semiconductor Science and Technology, 33 (2018) 113001.
- [2] R. Yatskiv, et al., Journal of Electronic Materials, (2020).
- [3] S. Tiagulskiy, et al., Materials Science in Semiconductor Processing, 176 (2024) 108343.
- [4] H. Zhai, et al., Ceramics International, 48 (2022) 24213-24233.
- [5] R. Yatskiv, et al., Applied Surface Science, 663 (2024) 160155.

Electrochemical characteristics of austenitic stainless steel after different times of sensitization

Viera Zatkalíková, Lenka Markovičová, Martin Slezák, and Milan Uhrčík

University of Žilina, Univerzitná 8215/1, 010 26 Žilina, Slovakia

Austenitic stainless steels are highly resistant to general corrosion in a wide range of corrosive environments. They have good balance of strength and ductility and appropriate toughness at both low and high temperatures. An advantage is also their weldability by most standard welding techniques. Common limitations to the use of austenitic steels are their susceptibility to the pitting in chloride-containing environments and also to the intergranular corrosion after their sensitization. This phenomenon is related to an exposure in the temperature range of 500-800 °C with consequent slow cooling which can lead to chromium content drop under the passivity limit near the grain boundaries due to chromium carbides precipitation. Sensitized, locally chromium depleted austenitic grains become susceptible to intergranular attack typically combined with pitting if aggressive environment contains chlorides. Sensitization of austenitic stainless steel can occur during various industrial and operational processes where the material is exposed to the critical temperatures in the sensitization range for a certain period. It is typical for heat exchangers, especially used in chemical, petrochemical, and oil/gas industries; chemical processing equipment; food processing equipment; intermediate temperature components for nuclear power plants, and also for exhaust systems. The conditions for the significant extensive sensitization of austenitic stainless steels can be determined according to the diagram of carbon solubility in austenite. The minimum sensitization time is affected by various factors as alloy chemical composition, temperature, carbon content and heating rate. Under specific conditions local sensitization can be caused by a short-term heating. This study deals with the corrosion behavior of AISI 304 stainless steel after 10, 6, 2, 1-hour sensitization time at the 650 °C temperature. Sensitization of the specimens is verified by ASTM A262 test. Corrosion resistance is evaluated by electrochemical characteristics of the potentiodynamic polarization performed in 1 M NaCl solution at the temperature 20 ± 3 °C on the specimens with high temperature surface oxides and after their removal by pickling. The electrochemical etching test in oxalic acid confirmed the ditch structure and the complete sensitization after 10 and 6 hours sensitization time. After 1 hour, the material showed only slight local signs of sensitization. The electrochemical characteristics of the potentiodynamic polarization were significantly affected by the surface state of the sensitized specimens. Regardless of the sensitization time, the specimens with high-temperature surface oxides behaved like an actively corroding metal. After pickling, they retained the passivity region, but with a higher passive current density than the as received material.

The research was funded by Scientific Grant Agency of Ministry of Education, Science and Sport of Slovak Republic and Slovak Academy of Sciences, grant KEGA 016ŽU-4/2023.

Transport properties deviation of polycrystalline Bi₂O₂Se: Causes and solutions

Jan Zich^{1,2}, Antonín Sojka¹, Jiří Navrátil^{1,2}, Karel Knížek², and Čestmír Drašar¹


¹University of Pardubice, Studentská 95, Pardubice 532 10, Czechia

²Institute of Physics of ASCR, Cukrovarnická 10, 162 00 Praha, Czech Republic

Bismuth oxyselenide (Bi₂O₂Se) is a promising thermoelectric (TE) material known for its high carrier mobility, non-toxic composition, and cost-effectiveness. However, its low intrinsic electrical conductivity necessitates doping to enhance performance. A major challenge is the significant variation in transport properties of bulk polycrystalline samples, even when synthesized using similar methods. This study examines the causes of these deviations and suggests solutions. Through analysis of literature and synthesis of samples using different compounds and methods, we identified that impurities and foreign phases significantly impact the transport properties of undoped Bi₂O₂Se. Techniques such as powder X-ray diffraction (PXRD), scanning electron microscopy/energy dispersive X-ray spectroscopy (SEM/EDS), Raman spectroscopy, and ATR IR spectroscopy were used to detect these impurities. To combat this issues, we propose a reproducible low-temperature solid-state synthesis process to produce high-purity Bi₂O₂Se. This method minimizes presence of high temperature associated secondary phases and ensures a consistent crystal structure, leading to improved and reliable transport properties. By refining synthesis techniques and controlling impurity levels, we aim to establish a standard for achieving consistent performance in Bi₂O₂Se.


The authors thank the Czech Science Foundation for financial support (Project No. 22-05919S) and Ministry of Education, Youth and Sports of Czech Republic (grant LM2023037).


- [1] Zhang Z-l, Wang T, Nisar M, et al. Enhanced thermoelectric properties of n-type Bi₂O₂Se by KCl doping. *Journal of Advanced Ceramics*, 12(9): 1767-1776 (2023)
- [2] Si Young Bae, Hyun-Sik Kim, Se Woong Lee, Okmin Park, Hyunjin Park, Sang-il Kim, Enhanced thermoelectric properties of I-doped polycrystalline Bi₂O₂Se oxyselenide, *Journal of Materials Research and Technology*, Volume 19 (2022)
- [3] Yuping Li, Haojie Huo, Hai Huang, Kai Guo, Xinxin Yang, Juanjuan Xing, Optimization of electrical and thermal transport properties of layered Bi₂O₂Se via Nb doping, *Journal of Materials Science*, vol. 56 (2021)
- [4] P. Ruleova, C. Drasar, P. Lostak, C.-P. Li, S. Ballikaya, C. Uher, Thermoelectric properties of Bi₂O₂Se, *Materials Chemistry and Physics*, Volume 119, Issues 1–2 (2010)


**CE DIGITAL
& ENVIRO
GROUPING**


CEDEG, Z.S.

CEDEG is an European ecosystem joining dynamic and progressive entities in the fields of digitalisation and advanced environmental technologies.
CEDEG promotes the concept of society 5.0 and creates meaningful synergistic and socially beneficial projects boosting the digital and green transformation and smart, sustainable and inclusive growth.

**Innovation
and support of
own members**

**International
cooperation**

**Dynamization
and growth of
member small-
sized and
medium-sized
company**


**Promoting the
principle of the
digital and
environmental
ecosystem**


DIGITALIZATION


- Internet of Things
- Digital Security
- Big Data
- Gaming
- Artificial Intelligence, Virtual Reality
- Smart City and mobility
- Microelectronics
- Cloud services

PROGRESSIVE ENVIRONMENTAL TECHNOLOGY

- Energy
- Circular economy
- Green technology
- Packaging and biodegradable materials
- Water, air and their purification
- Advanced technology in engineering
- Nanotechnology

 **+420 775 282 431**

 **riha@cedeg.eu**

 **www.cedeg.eu**



CZECH - SLOVAK TECHNOLOGY SUMMIT 2025

MIKULOV CASTLE, 4TH - 5TH JUNE 2025



Estimated number of participants: 250 – 350 physically, more via the stream

Organisators: CEDEG, ARICOMA, NCA, EDIH CTU in Prague, Slovak Chamber of Commerce and Industry, Slovak University of Technology in Bratislava, University of Pardubice, EDIH Northern and Eastern Bohemia, ESET, National Centre of Industry 4.0 at CIIRK/ČVUT, Ministry of Industry and Trade of the Czech Republic

Partners: Dozens of partners: ESET, AXENTA, BlackBerry, etc.

Patronage: Ministry of Industry and Trade of the Czech Republic, Regional Development and Informatization of the Slovak Republic, Ministry of Regional Development of the Czech Republic

Addressed: 14.000 own contacts of CEDEG and NCA, 48.000 contacts of individual co-organising partners

We invite you as a potential partner, C-STs 2025 is an ideal lead generator to expand your presence in Czech and Slovak Republic.



+420 775 282 431



riha@cedeg.eu




www.cedeg.eu

teste

ModuLab XM MTS is configurable design
for materials, electrochemistry and
photovoltaic measurements in one chassis

CHECK IT ONLINE

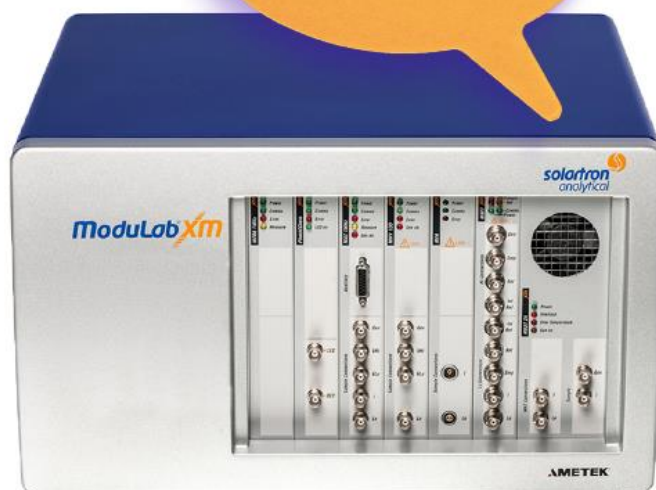

Jesenná radosť v Tatrách

Balík zahŕňa:

- Ubytovanie v štandardnej dvojlôžkovej izbe. Pre rodiny s deťmi alebo viačlenné skupiny je možné ubytovanie v rodinných izbách za príplatok.
- Polpenzia. Raňajky a večere formou bohatých bufetových stolov v závislosti od obsadenosti hotela. Inak raňajky kontinentálne a večere formou výberu z menu.
- Darček: 2x Welcome drink.
- Darček: 1x Kavička pre 2 osoby
- Vonkajšie detské ihrisko
- Detský kútik
- Parkovanie Zadarmo
- WiFi Zadarmo

**2 noci: 199€ s DPH
(229€)**

**3 noci: 299€ s DPH
(329€)**

Cena platí pre 2 dospelé osoby v termíne od 01.10.2024 – 15.12.2024

**4 noci: 389€ s DPH
(419€)**

**5 noci: 479€ s DPH
(509€)**

Doplatky

- Pri všetkých variantoch diéta do 2,99 rokov bez nároku na lôžko a služby ZADARMO.
- Ďalšie dieťa od 3 od 11,99 rokov na prístelke s polpenziou +25 €/noc.
- Ďalšie dieťa od 12 od 14,99 rokov na prístelke s polpenziou +30 €/noc.
- Ďalšia osoba od 15 rokov na prístelke s polpenziou +35 €/noc.
- Zapožičanie detskej postielky +10€/pobyt.
- Doplatok za neobsadené lôžko +20€/noc.
- Rodinná izba Comfort +30€/noc.
- Rodinná izba Standard +20€/noc.
- Domáce zviera +10€/noc.
- Povinný doplatok: V hoteli sa dopláca miestny poplatok 1€/noc za osoby staršie ako 15 rokov.

Nový hotel RYSY +421 910 533 935 recepacia@rysyhotel.sk www.rysyhotel.sk

RYSY
HIGH TATRAS HOTEL

Author Index

A

Adamczyk-Cieślak Bogusława, 48
Antala Richard, 17
Arab Mohamed, 65

B

Babalová Eva, 18, 19
Babčenko Oleg, 33
Babin Vladimir, 40
Badri Yousif, 65
Bártová Katarína , 45
Bašinová Nikola, 70
Behúlová Mária, 18, 19
Bílek Ondřej, 20, 69
Bryknar Zdeněk, 57
Bucha Peter, 53
Bujdák Radovan, 21, 28
Buranský Ivan , 55
Buryi Maksym, 33

C

Černíčková Ivona, 22, 26, 49
Chaika Mykhailo , 35
Chevalier Joris M., 39
Chobot Patrik , 50
Chvalníková Veronika, 32, 66
Čička Roman, 22, 49
Cyprich Martin, 23

D

Damazyan Grigori , 35
Derzsi Mariana, 21, 28
Dinhová Thu N., 70
Dobrovodský Jozef, 29
Dománková Mária , 45
Drašar Čestmír, 63, 72
Drienovský Marián, 22, 26, 49
Dubnička Maroš, 55
Đugel Daniel, 24
Đuriš Rastislav, 25
Đuriška Libor, 22, 26, 49
Dušek Vojtěch, 37

Džugan Jan, 27

F

Fabušová Diana, 21, 28
Ferenčík Filip, 29
Feszterová Melánia, 30
Fortin Lucin, 39
Frnčík Martin, 64

G

Gamil Ahmad, 65
Gaur Kartik, 56
Gavalec Matúš , 45
Ghani Saud, 65
Gregor Tomáš , 35
Grym Jan, 70

H

Halmanová Michaela, 22, 26
Hořava Cyril, 69
Hostinský Tomáš, 31
Hrbál Jakub, 68
Hudecová Silvia, 32, 66

J

Jarý Vítězslav, 59
Javořík Jakub, 37
John David, 33
Jorík Vladimír, 58
Jurina František, 34
Jurkovičová Terézia, 40

K

Kajan Juraj, 35
Kamenský Miroslav, 36
Klenovský Petr, 56
Klonz Maximilian , 56
Knedlová Jana, 20, 37, 42, 69
Knížek Karel, 63, 72
Kopelent Michal, 48
Kotýková Monika, 40
Koudelka Ladislav, 31

Kovačócy Pavel, 52
Kožíšek Zdeněk, 38
Král Robert, 3840
Kratochvíl Adam, 48
Křehlíková Kateřina, 40
Kršjak Vladimír, 41
Kubášová Kristýna, 48
Kubiš Matej, 41
Kubišová Milena, 37, 42
Kučerková Romana, 40, 59
Kuchtanin Vladimír, 43, 58
Kucmanová Alexandra, 44, 61
Kudláč Marek, 45
Kusý Martin, 26

L

Labaš Vladimír, 46
Labašová Eva, 25, 46
Lapašová Lenka, 24
Limame Imad, 56
Lorimer Shelley A., 47
Losertová Monika, 48

M

Machajdíková Tereza, 22, 49
Maixner Jaroslav, 70
Málková Zuzana, 40
Marcaník Miroslav, 69
Markovičová Lenka, 50, 71
Maroszová Jaroslava, 51
Martinkovič Maroš, 52
Medvecký Štefan, 35
Mičová Julia, 59
Mičová Júlia, 54
Mikolajčík Martin, 66
Milde Ján, 68
Moncol' Ján, 58
Morovič Ladislav, 55
Moško Michal, 17
Mošner Petr, 31
Mudi Priyabrata, 56

N

Nadž Milan, 53
Navrátil Jiří, 63, 72

Němec Tomáš, 19
Neyková Neda, 59
Nicaise Alex, 39
Nikl Martin, 40
Noga Pavol, 29, 41
Novák Radim, 33, 54, 59

P

Palček Peter, 32, 66
Palekar Chirag C., 56
Pata Vladimír, 42, 69
Pätoprstý Boris, 34, 55
Pavlik Ján, 58
Pavlík Marián, 19
Plecháček Tomáš, 63
Podhorský Martin, 56
Podhorský Štefan, 34, 67
Potůček Zdeněk, 57
Poupon Morgane, 39
Průša Petr, 40
Puchoňová Miroslava, 58

R

Reitzenstein Stephan, 56
Remeš Štěpán, 54
Remeš Štěpán, 59
Remeš Zdeněk, 33, 54, 59
Rezek Bohuslav, 33
Říha Ivo, 60
Rodt Sven, 56
Rohlíček Jan, 40
Rolník Ladislav, 53
Ruleová Pavlína, 63

S

Šafrata David D., 39
Šafrata Jan P., 39
Sahul Martin, 19
Sahul Miroslav, 19
Ščasná Margita, 44, 61
Sedláček Radek, 48
Šikyňa Lukáš, 32
Šimna Vladimír, 62
Sirotiak Maroš, 61
Slezák Martin, 66, 71

Slnek Dávid , 45
Smetana Bedřich, 48
Sojka Antonín, 63, 72
Straka Róbert, 68
Šuba Oldřich, 42
Šugár Peter, 17, 64
Šugárová Jana, 17, 64
Šurdová Zuzana, 32
Syam Thaer, 65
Száraz Zoltán , 29, 41

T

Tinkova Vira , 35
Tokár Kamil, 21, 28
Tremisin Anton S., 40
Tripathi Sarthak, 56

U

Uhríček Milan, 32, 66, 71
Ukraitsev Egor, 33

V

Vaněček Vojtěch, 40
Volf Jakub, 33
Vopát Tomáš, 34, 67
Vorochta Michael, 70
Vozár Marek, 55, 68
Vrbová Hana, 20, 69
Vrbová Hanka, 37

Y

Yatskiv Roman, 70

Z

Zatkalíková Viera, 50, 71
Zemenová Petra, 3840
Zich Jan, 63, 72
Zlámal Jan, 20

LIST OF PARTICIPANTS

Mr. Richard Antala
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Ivona Černíčková
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Eva Babalová
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
ul. Jána Bottu Č. 2781/25
91724 Trnava
Slovakia

Mr. Martin Cyprich
Hermes LabSystems s.r.o.
Púchovská 12
831 06 Bratislava
Slovakia

Dr. Mária Behúlová
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Mr. Daniel Ďugel
University of Žilina
Faculty of Civil Engineering
B.S.Timravy 6
010 26 Žilina
Slovakia

Dr. Ondřej Bílek
Tomas Bata University in Zlín
Faculty of Technology
Vavrečkova 5669
760 01 Zlín
Czechia

Dr. Rastislav Ďuriš
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Mr. Radovan Bujdák
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava,
ATRI
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Libor Ďuriška
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Prof. Jan Džugan
COMTES FHT a.s.
Průmyslová 995
334 41 Dobřany
Czechia

Dr. Silvia Hudecová
University of Žilina
Faculty of Mechanical Engineering, Department of Materials Engineering
Univerzitná 8125/1
010 26 Žilina
Slovakia

Miss. Diana Fabušová
Slovak University of Technology in Bratislava
Faculty of Materials science and technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Mr. David John
Institute of Physics of the Czech Academy of Sciences
Cukrovarnická 10/112
162 00 Praha 6
Czechia

Mr. Filip Ferenčík
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava, ATRI
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. František Jurina
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Melánia Feszterová
Constantine the Philosopher University in Nitra
Tr. A. Hlinku 1
949 74 Nitra-Chrenová
Slovakia

Dr. Juraj Kajan
University of Žilina
Univerzitná 8215
010 26 Žilina
Slovakia

Mr. Tomáš Hostinský
University of Pardubice
Faculty of Chemical Technology, Department of General and Inorganic Chemistry
Studentská 573
532 10 Pardubice
Czechia

Dr. Miroslav Kamenský
TESTOVACI TECHNIKA s.r.o.
Československé armády 923
290 01 Poděbrady
Czechia

Dr. Jana Knedlová
Tomas Bata University in Zlín
Faculty of Technology
Vavrečkova 5669
760 01 Zlín
Czechia

Dr. Milena Kubišová
Tomas Bata University in Zlín
Faculty of Technology
Vavrečkova 5669
760 01 Zlín
Czechia

Dr. Zdeněk Kožíšek
Institute of Physics of the Czech Academy of Sciences
Cukrovarnická 10
162 00 Praha 6
Czechia

Dr. Vladimír Kuchtanin
Slovak University of Technology in Bratislava
Faculty of Chemical and Food Technology
Radlinského 9
812 37 Bratislava
Slovakia

Dr. Robert Kral
Institute of Physics of the Czech Academy of Sciences
Cukrovarnická 10
162 00 Praha 6
Czechia

Dr. Alexandra Kucmanová
Slovak University of Technology Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Kateřina Křehlíková
Institute of Physics of the Czech Academy of Sciences
Cukrovarnická 112/10
162 00 Praha 6
Czechia

Mr. Marek Kudláč
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Mr. Matej Kubiš
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Eva Labašová
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Lenka Lapašová
University of Žilina
Univerzitná 8215
010 26 Žilina
Slovakia

Dr. Jaroslava Maroszová
Slovak University of Technology in Bratislava
Faculty of Chemical and Food Technology
Radlinského 9
812 37 Bratislava
Slovakia

Prof. Shelley Anne Lorimer
MacEwan University
10700-104 Ave
Edmonton
Canada

Prof. Maroš Martinkovič
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Monika Losertová
VŠB-Technical University of Ostrava
Faculty of Materials Science and Technology
17. listopadu 2172/15
708 00 Ostrava – Poruba
Czechia

Mr. Milan Nad'
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Tereza Machajdíkova
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Mr. Radim Novák
Institute of Physics of the Czech Academy of Sciences
Na Slovance 1999/2
182 00 Praha 8
Czechia

Dr. Lenka Markovičová
University of Žilina
Univerzitná 8215/1
010 26 Žilina
Slovakia

Dr. Blažena Papánková
Slovak University of Technology in Bratislava
Faculty of Chemical and Food Technology
Radlinského 9
812 37 Bratislava
Slovakia

Dr. Boris Pätoprstý
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Zdeněk Remeš
Institute of Physics of the Czech Academy of Sciences
Na Slovance 1999/2
182 00 Praha 8
Czechia

Mr. Martin Podhorský
Technische Universität Berlin
Institute of Solid State Physics
Hardenbergstraße 36
D-10623 Berlin
Germany

Dr. Ivo Říha
CEDEG - CE Digital and Enviro Grouping
Studentska 6202/17, 708 00 Ostrava-Poruba
708 00 Ostrava-Poruba
Czechia

Dr. Zdeněk Potůček
Czech Technical University in Prague
Faculty of Nuclear Sciences and Physical Engineering
Trojanova 13
120 00 Prague
Czechia

Dr. Margita Ščasná
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Miroslava Puchoňová
Slovak University of Technology in Bratislava
Faculty of Chemical and Food Technology
Radlinského 9
812 37 Bratislava
Slovakia

Dr. Vladimír Šimna
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Mr. Štěpán Remeš
Institute of Physics of the Czech Academy of Sciences
Na Slovance 2
182 00 Praha 8
Czechia

Mr. Antonín Sojka
University of Pardubice
Faculty of Chemical Technology
Studentská 95
532 10 Pardubice
Czechia

Prof. Peter Šugár
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Marek Vozár
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Dr. Jana Šugárová
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Miss. Hana Vrbová
Tomas Bata University in Zlín
Faculty of Technology
Vavrečkova 5669
760 01 Zlín
Czechia

Dr. Thaer Syam
TAMU
850
Doha
Qatar

Dr. Roman Yatskiv
Czech Academy of Sciences
Institute of Photonics and Electronics
Chaberská 1014/57
Praha
Czechia

Dr. Milan Uhrčík
University of Žilina
Faculty of Mechanical Engineering, Department of Materials Engineering
Univerzitná 8215/1
010 26 Žilina
Slovakia

Dr. Viera Zatkalíková
University of Žilina
Faculty of Mechanical Engineering, Department of Materials Engineering
Univerzitná 8215/1
010 26 Žilina
Slovakia

Dr. Tomáš Vopát
Slovak University of Technology in Bratislava
Faculty of Materials Science and Technology in Trnava
Ulica Jána Bottu č. 2781/25
917 24 Trnava
Slovakia

Mr. Jan Zich
University of Pardubice
Studentská 95
532 10 Pardubice
Czechia

ISBN: 978-80-8208-130-8 (online version)